

SIMATIC S5-115U/H/F

Digital input/output modules

Digital input modules

Application



The digital input modules convert the external binary signals from the process to the internal signal level of the programmable controllers.

Design

Digital input modules are available with 8, 16 or 32 inputs and for a range of input voltages. The modules require 1/2 or 1 slot (depending on the subrack).

The modules comprise:

- Green LEDs for indicating signal status
- Enable input F (434-4 digital input module for NAMUR sensors only) for disabling input signals

- Relay contact (MELD) and 24 V input (RESET) for interrupt processing
- The signal leads must be connected with front connectors. They can be labelled in the fields next to the LEDs.

Principle of operation

Enable input

Digital input 434-4 only:
The input signals can be dis-abled by means of enable input F. This enable input can be deactivated by removing a jumper on the module.

Interrupt processing

Digital input 434-7 only:
A group signal generates an interrupt in the CPU when a particular input signal changes. The group signal drives a latching relay on the module (the relay contact MELD is accessible from the front panel), which can be reset via a 24 V input (RESET).

In the user program the user can specify for each input whether the interrupt is to be set by the positive- or negative-going edge.

If interrupt processing is not essential, the 434-7 module can be used in any type of subrack. Interrupt evaluation by the 434-7 digital input module is only possible in a central controller. The module takes up two bytes for input addresses and two bytes for output addresses.

Interrupt evaluation is only possible in an expansion unit (ER 701-3 subrack) which is connected using the IM 307 and IM 317 interface modules and if the 432-4 digital input module (S5-135/-155U) is used in the expansion unit instead of the 434-7 digital input module generating the interrupt.

Note

All digital input modules of the S5-135U/-155U programmable controllers (see Section 4) can be used in the S5-115U with adapter casings.

The 434-4 digital input module requires an adapter casing (see page 3/98).

Technical specifications

Digital input module	6ES5 420-7LA11	6ES5 430-7LA12	6ES5 431-7LA11	6ES5 432-7LA11	6ES5 434-7LA12	6ES5 434-4UA12
Number of inputs	32	32	16	16	8 (with group signal)	see page 4/36 (S5-135U, S5-155U/H)
Galvanic isolation	No	Yes (optocoupler)	Yes (optocoupler)	Yes (optocoupler)	Yes (optocoupler)	
• In groups of	—	8	4	4	1	
Input voltage	24 V DC	24 V DC	24/48 V UC	48/60 V UC	24 V DC	
• Rated value	—	—	47 ... 63 Hz	47 ... 63 Hz	—	
• Frequency with AC	—	—	0 ... 5 V	0 ... 10 V	—	
• For "0" signal	- 30 ... + 5 V	- 30 ... + 5 V	13 ... 60 V	30 ... 72 V	- 30 ... + 5 V	
• For "1" signal	+ 13 ... + 30 V	+ 13 ... + 30 V	8.5/10.5 mA	9/10 mA	+ 13 ... + 30 V	
Input current for "1" signal typ.	8.5 mA	8.5 mA			8.5 mA	
Delay						
• At "0" → "1"	1.4 ... 5 ms	2.2 ... 4.6 ms	2 ... 13 ms	2 ... 13 ms	0.5 ... 1.5 ms	
• At "1" → "0"	1.4 ... 5 ms	4.5 ... 12 ms	10 ... 25 ms	10 ... 25 ms	0.5 ... 1.5 ms	
Load factor ¹⁾ at 55 °C	100 %	100 %	100 %	100 %	100 %	

1) With respect to number of inputs in a group

SIMATIC S5-115U/H/F

Digital input/output modules

Digital input modules (continued)

Technical specifications (continued)

Digital input module (cont.)	6ES5 420-7LA11	6ES5 430-7LA12	6ES5 431-7LA11	6ES5 432-7LA11	6ES5 432-7LA12	6ES5 434-4UA12
Cable length						see page 4/36
• Unshielded max.	600 m (1968 ft)	600 m (1968 ft)	600 m (1968 ft)	600 m (1968 ft)	600 m (1968 ft)	(S5-135U,
• Shielded max.	1000 m (3280 ft)	1000 m (3280 ft)	1000 m (3280 ft)	1000 m (3280 ft)	1000 m (3280 ft)	S5-155U/H)
Interrupt output	—	—	—	—	Latching relay contact	
• Permissible load max.	—	—	—	—	100 V DC; 0.2 A	
• Switching capacity max.	—	—	—	—	20 W; 35 VA	
Reset input	—	—	—	—	24 V DC	
Insulation voltage rating (external connections to housing, internal connections, other groups)						
• In acc. with VDE 0160	—	30 V DC	60 V AC	60 V AC	30 V DC	
• Tested with	—	500 V AC	500 V AC	500 V AC	500 V AC	
Current consumption						
• Internal (from power supply module; 5 V) max.	5 mA	5 mA	5 mA	5 mA	70 mA	
Power loss (rated operation) typ.	6.5 W	6.5 W	9.0 W	10.0 W	2 W	
Front connector	46-pin	46-pin	24-pin	24-pin	46-pin	
Weight approx.	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	
Digital input module	6ES5 435-7LA11	6ES5 435-7LB11	6ES5 435-7LC11	6ES5 436-7LA11	6ES5 436-7LB11	6ES5 436-7LC11
Number of inputs	16	16	8	16	16	8
Galvanic isolation	Yes (optocoupler)	Yes (optocoupler)	Yes (optocoupler)	Yes (optocoupler)	Yes (optocoupler)	Yes (optocoupler)
• in groups of	4	2	1	4	2	1
Input voltage						
• Rated value	115 V UC	115 V UC	115 V UC	230 V UC	230 V UC	230 V UC
• Frequency with AC	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz	47 ... 63 Hz
• For "0" signal	0 ... 40 V	0 ... 40 V	0 ... 40 V	0 ... 70 V	0 ... 70 V	0 ... 100 V
• For "1" signal	85 ... 135 V	85 ... 135 V	85 ... 135 V	170 ... 264 V	170 ... 264 V	170 ... 264 V
Input current	6 mA DC	6 mA DC	6 mA DC	2.2 mA DC	2.2 mA DC	2.2 mA DC
at "1" signal typ.	15 mA AC	10 mA AC	10 mA AC	15 mA AC	15 mA AC	16 mA AC
Delay						
• At "0" → "1"	2 ... 13 ms	2 ... 13 ms	2 ... 13 ms	2 ... 13 ms	2 ... 13 ms	2 ... 13 ms
• At "1" → "0"	10 ... 25 ms	10 ... 25 ms	10 ... 25 ms	10 ... 35 ms	10 ... 35 ms	10 ... 25 ms
Load factor ¹⁾						
• At 55 °C	75 %	75 %	75 %	75 %	75 %	100 %
• At 20 °C	100 %	100 %	100 %	100 %	100 %	100 %
Cable length						
• Unshielded max.	600 m (1968 ft)	600 m (1968 ft)	600 m (1968 ft)	600 m (1968 ft)	600 m (1968 ft)	600 m (1968 ft)
• Shielded max.	1000 m (3280 ft)	1000 m (3280 ft)	1000 m (3280 ft)	1000 m (3280 ft)	1000 m (3280 ft)	1000 m (3280 ft)
Insulation voltage rating (external connections to housing, internal connections, other groups)						
• In acc. with VDE 0160	250 V AC	250 V AC	250 V AC	250 V AC	250 V AC	250 V AC
• Tested with	1500 V AC	1500 V AC	2700 V AC	1500 V AC	1500 V AC	2700 V AC
Current consumption						
• Internal (from power supply module; 5 V) max.	5 mA	5 mA	5 mA	5 mA	5 mA	5 mA
Power loss (rated operation) typ.	11.0 W	11.0 W	5.5 W	11.0 W	11.0 W	5.5 W
Front connector	24-pin	24-pin	24-pin	24-pin	24-pin	24-pin
Weight approx.	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)

1) With respect to number of inputs in a group

SIMATIC S5-115U/H/F

Digital input/output modules

Digital input modules (continued)

Connection diagrams

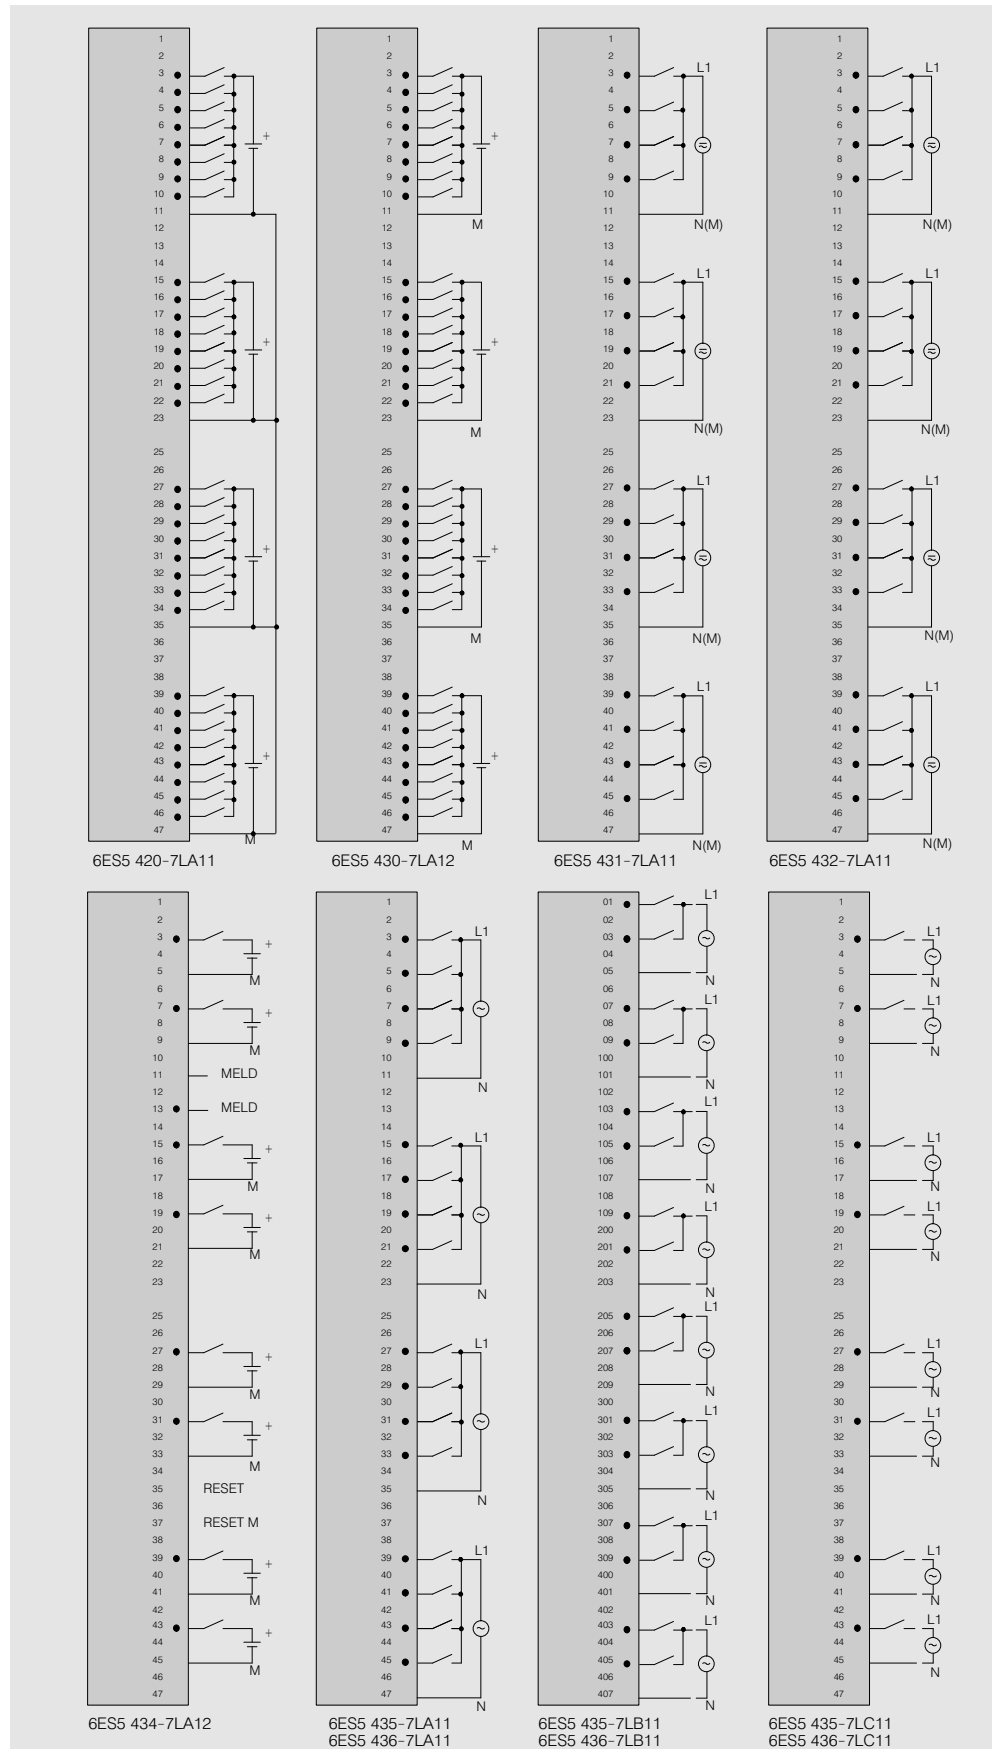


Fig. 3/25 Connection diagrams for digital input modules

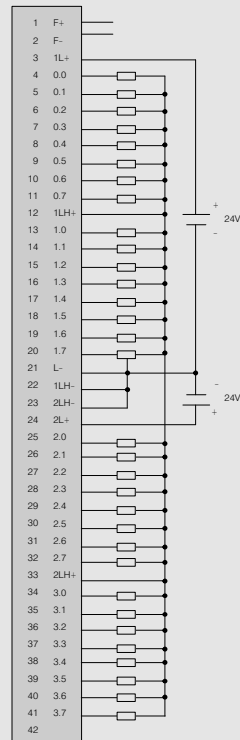
SIMATIC S5-115U/H/F

Digital input/output modules


Digital input modules (continued)

Connection diagrams (continued)

3



434-4UA12 with NAMUR sensors







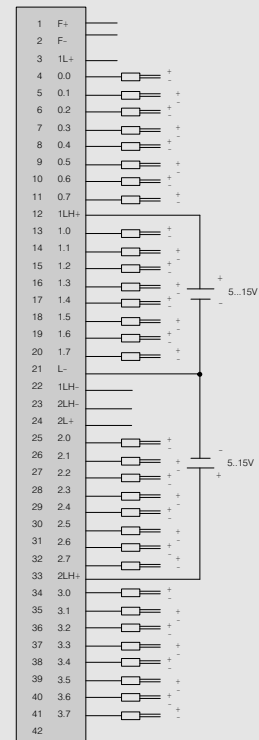


434-4UA12 with TTL/CMOS sensors

Fig. 3/26 Connection diagrams for digital input modules

Block diagrams and module combinations for S5-115F

Block diagrams and
module combinations

Block diagram	Characteristics	Permissible module combinations
 Subunit A or B	I/O type 1; binary input; non safety-related	1 x DI 6ES5 430-7LA12 or 1 x DI/DQ 6ES5 482-7LA11 or 1 x DI 6ES5 435-7LC11 or 1 x DI 6ES5 436-7LC11
 Subunit A Subunit B	I/O type 2; binary input; safety-related; intermittent mode; single-channel sensor	2 x DI 6ES5 430-7LA12 or 2 x DI 6ES5 435-7LC11 or 2 x DI 6ES5 436-7LC11
 Subunit A Subunit B	I/O type 2; binary input; safety-related; intermittent mode; single-channel sensor	2 x DI 6ES5 430-7LA12 or 2 x DI 6ES5 435-7LC11 or 2 x DI 6ES5 436-7LC11
 Subunit A or B Subunit A Subunit B	I/O type 3; binary input; safety-related; single-channel sensor; sensor can be controlled	1 x DQ 6ES5 451-7LA11 2 x DI 6ES5 430-7LA12 or 1 x DQ 6ES5 456-7LB11 2 x DI 6ES5 435-7LC11 or 1 x DQ 6ES5 456-7LB11 2 x DI 6ES5 436-7LC11 or 1 x DQ 6ES5 451-7LA11 2 x DI 6ES5 434-7LA11
 Subunit A or B Subunit A Subunit B	I/O type 3; binary input; safety-related; two-channel sensor; sensor can be controlled	1 x DQ 6ES5 451-7LA11 2 x DI 6ES5 430-7LA12 or 1 x DQ 6ES5 456-7LB11 2 x DI 6ES5 435-7LC11 or 1 x DQ 6ES5 456-7LB11 2 x DI 6ES5 436-7LC11
 Subunit A Subunit A or B Subunit B	I/O type 3; binary input; safety-related; single-channel sensor; sensor cannot be controlled	1 x DQ 6ES5 458-7LA11¹⁾ 2 x DI 6ES5 430-7LA12 or 1 x DQ 6ES5 458-7LB11 2 x DI 6ES5 430-7LA11 or 1 x DQ 6ES5 458-7LB11 2 x DI 6ES5 434-7LA11 or 1 x DQ 6ES5 458-7LA11¹⁾ 2 x DI 6ES5 434-7LA11
 Subunit A Subunit A Subunit A Subunit B Subunit B	I/O type 3; binary input; safety-related; two-channel sensor; sensor cannot be controlled	2 x DQ 6ES5 458-7LA11¹⁾ 2 x DI 6ES5 430-7LA12 or 2 x DQ 6ES5 458-7LB11 2 x DI 6ES5 430-7LA12

1) For new system 6ES5 453-4UA11 only