

APMU adapter for cabinet-door mounting

The PMU parameterizing unit included in the standard version of all drive units can also be built into a cabinet door using the APMU adapter.

For dimensions and door cut-out, see below.

Note

The OP1S operator control panel can also be plugged onto the APMU.

Designation	Order No.
APMU adapter for mounting in cabinet door, incl. 6.6 ft (2 m) cable	**6SX7010–0AA10**

3

OP1S comfort operator control panel

The OP1S operator control panel (*O*perator *P*anel) is an optional input/output unit which can be used for parameterizing the drive units. Plain text displays greatly facilitate parameterization.

For a more detailed description of the OP1S operator control panel, see Section 2 "Operator control and visualization".

Designation		Order No.
OP1S control panel		**6SE7090–0XX84–2FK0**
AOP1S adapter for cabinet-door mounting incl. 16.4 ft (5 m) connecting cable		**6SX7010–0AA00**
Connecting cable PMU-OP1S 9.8 ft (3 m)	9.8 ft (3 m)	**6SX7010–0AB03**
Connecting cable PMU-OP1S 16.4 ft (5 m)	16.4 ft (5 m)	**6SX7010–0AB05**

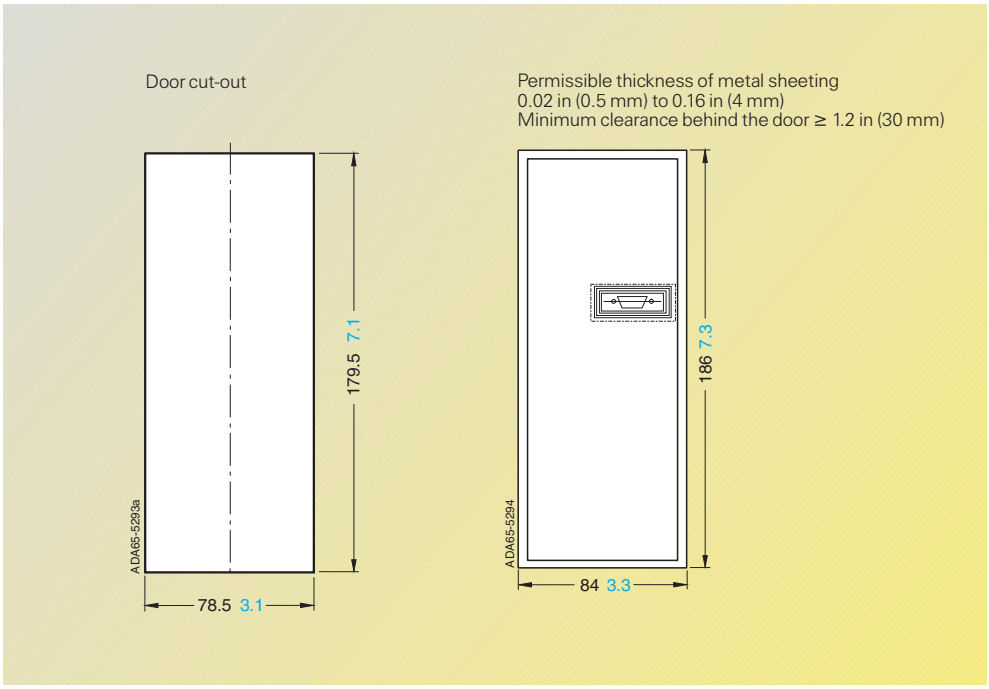


Fig. 3/16
AOP1S/APMU adapter and door cut-out

Dimensions in mm
Dimensions in inches