



Table 20 - Catalog Number Conversions for 1250 Touch Screen Terminals

From Existing PanelView Plus/PanelView Plus CE		To New PanelView Plus 6	+	Communication Module ⁽¹⁾
1250 Touch Screen Terminals				
Configured terminal with ControlNet communication	2711P-T12C15A1	2711P-T12C4A8	+	2711P-RN15S
	2711P-T12C15A2			
	2711P-T12C15A6	2711P-T12C4A9		
	2711P-T12C15A7			
	2711P-T12C15B1	2711P-T12C4A8		
	2711P-T12C15B2			
	2711P-T12C15D1	2711P-T12C4D8		
	2711P-T12C15D2			
	2711P-T12C15D6	2711P-T12C4D9		
	2711P-T12C15D7			
Base unit terminal with built-in Ethernet and RS-232 communication ports	2711P-T12C4A1	2711P-T12C4A8	+	2711P-RN20 provides additional Ethernet port
	2711P-T12C4A2			
	2711P-T12C4A6	2711P-T12C4A9		
	2711P-T12C4A7			
	2711P-T12C4B1	2711P-T12C4A8		
	2711P-T12C4B2			
	2711P-T12C4D2K	2711P-T12C4D8K		
	2711P-T12C4D6K			
	2711P-T12C4D1	2711P-T12C4D8		
	2711P-T12C4D2			
	2711P-T12C4D6	2711P-T12C4D9		
	2711P-T12C4D7			
Configured terminal with DH+ /DH-485 communication	2711P-T12C6A1	2711P-T12C4A8	+	2711P-RN6
	2711P-T12C6A2			
	2711P-T12C6A6	2711P-T12C4A9		
	2711P-T12C6A7			
	2711P-T12C6B1	2711P-T12C4A8		
	2711P-T12C6B2			
	2711P-T12C6D1	2711P-T12C4D8		
	2711P-T12C6D2			
	2711P-T12C6D6	2711P-T12C4D9		
	2711P-T12C6D7			




(1) Refer to [Legacy PanelView Plus 700...1500 Terminal Support on page 26](#) if your application requires remote I/O or DeviceNet communication.

PanelView Plus and PanelView Plus CE 1250 Dimensions

1250 Keypad or Keypad/Touch Terminal

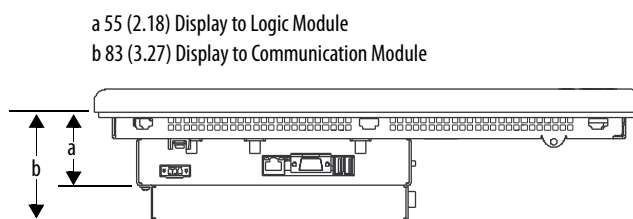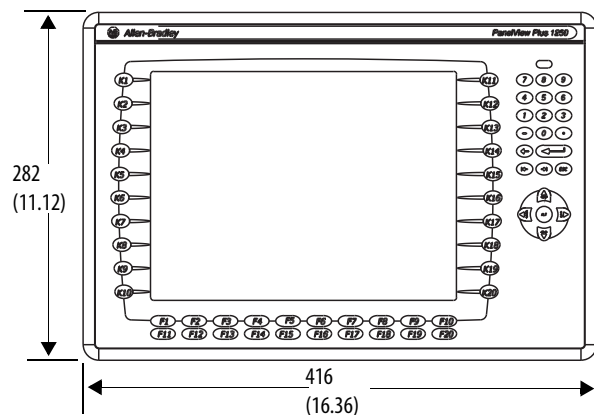

1250 Touch Screen Terminal

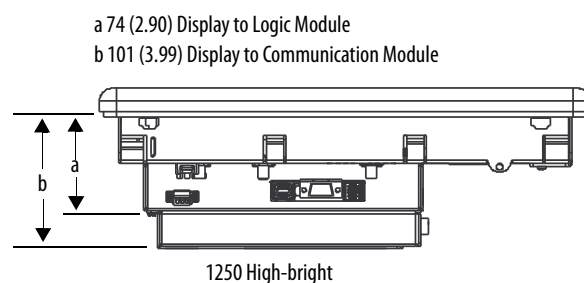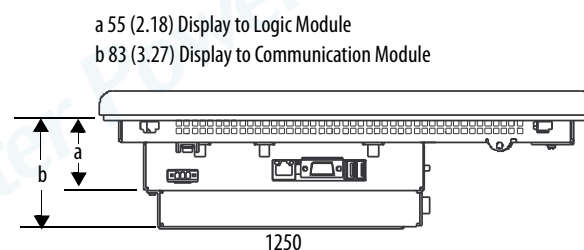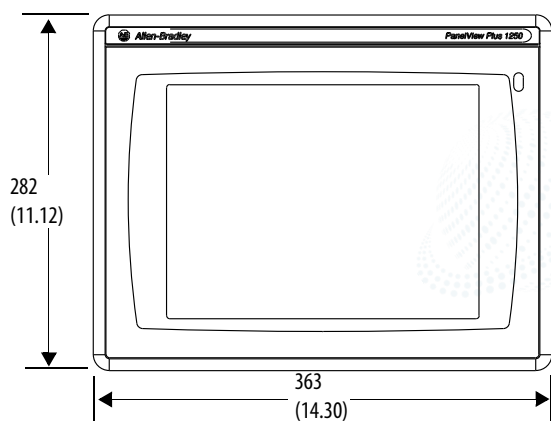

The depth dimensions are shown for:

- base-configured unit (display module and logic module).
- base-configured unit with communication module.