

Official Product Identity Mapping

AS3201F-02-06SA

Official SMC web catalog identity: AS3201F-02-06SA

AS3201F = meter-out elbow speed controller, body size 3

-02 = R1/4 port; -06 = 6 mm tube outside diameter

S = with sealant; A = catalog configuration suffix

The following official AS Series pages define the family construction and order-code fields.

Official model page:

<https://www.smcworld.com/webcatalog/s3s/ja-jp/detail/?partNumber=AS3201F-02-06SA>

Speed Controller with One-touch Fitting Elbow Type/Universal Type

AS Series



Minimizes installation time and cost

Reduces the mounting height and enables compact machinery design. Effective area is larger than the former model.

Tube swivels 360°

Universal type permits 360° piping swivel.

ø2 size added to applicable tubing sizes

- **Metric size** (Release button: White color)
ø2, ø3.2, ø4, ø6, ø8, ø10, ø12
- **Inch size** (Release button: Orange color)
ø1/8", ø5/32", ø3/16", ø1/4", ø5/16", ø3/8", ø1/2"

Maximum operating pressure 1 MPa max.

Applicable tubing materials

Nylon, soft nylon, and polyurethane tubing are applicable.

Retainer prevents accidental loss of needle.

Option

Nickel plated option

Model

Elbow type	Universal type	Port size	Applicable tubing O.D.													
			Metric size							Inch size						
			2	3.2	4	6	8	10	12	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	1/2"
AS12□1F-M3	AS13□1F-M3	M3 x 0.5	● ⁽²⁾	●	●	●	●	●	●	●	●	●	●	●	●	●
AS12□1F-M5	AS13□1F-M5	M5 x 0.8	● ⁽²⁾	●	●	●	●	●	●	●	●	●	●	●	●	●
AS12□1F-U10/32	AS13□1F-U10/32	10-32UNF	●	●	●	●	●	●	●	●	●	●	●	●	●	●
AS22□1F-01	AS23□1F-01	R1/8	●	●	●	●	●	●	●	●	●	●	●	●	●	●
AS22□1F-02	AS23□1F-02	R1/4	●	●	●	●	●	●	●	●	●	●	●	●	●	●
AS32□1F-02	AS33□1F-02	R1/4	●	●	●	●	●	●	●	●	●	●	●	●	●	●
AS32□1F-03	AS33□1F-03	R3/8	●	●	●	●	●	●	●	●	●	●	●	●	●	●
AS42□1F-04	AS43□1F-04	R1/2	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Note 1) AS12□1F-M5-02 applicable cylinder bore sizes are 2.5, 4, 6.

Note 2) Elbow type only

Note 3) Meter-out and meter-in types can be visually differentiated by the lock nut. The lock nut on the meter-out type is zinc chromated (the round lock nut is electroless nickel plated), while the meter-in type is black zinc chromate plated.

Note 4) ●: Brass parts are electroless nickel plated, provided as standard. (N specifications)

Note 5) The elbow type is electroless nickel plated as standard. (N specifications)

Specifications

Fluid	Air
Proof pressure	1.5 MPa (1.05 MPa ⁽¹⁾)
Max. operating pressure	1 MPa (0.7 MPa ⁽¹⁾)
Mini. operating pressure	0.1 MPa
Ambient and fluid temperature	-5 to 60°C (No freezing)
Applicable tubing material ⁽²⁾	Nylon, Soft nylon, Polyurethane ⁽³⁾
Option	With seal ⁽⁴⁾ , Round lock nut ⁽⁵⁾ , Electroless nickel plated

Note 1) In case of AS12□1F-M3-02, AS12□1F-M5-02

Note 2) Use caution regarding the max. operating pressure when soft nylon or polyurethane tubing is used. (Refer to pages 678 and 682 for details.)

Note 3) In case of AS12□1F-M3-02 and AS12□1F-M5-02, polyurethane only.

Note 4) M3, M5, 10-32UNF type ports are not available with seals.

Note 5) Brass parts are all electroless nickel plated.

Flow Rate and Sonic Conductance

Model		AS12□1F-M3 AS13□1F-M3 AS12□1F-M5-02	AS12□1F-M5 AS13□1F-M5	AS22□1F-01 AS23□1F-01	AS22□1F-02 AS23□1F-02	AS32□1F AS33□1F		AS42□1F AS43□1F					
Tubing O.D.	Metric size	ø2, ø3.2, ø4	ø3.2, ø4, ø6	ø3.2, ø4	ø6, ø8, ø10	ø4	ø6	ø8, ø10	ø6	ø8	ø10, ø12	ø10	ø12
	Inch size	ø1/8", ø5/32"	ø1/8", ø3/16", ø1/4", ø5/32"	ø1/8", ø5/32"	ø3/16", ø1/4", ø5/16"	ø5/32", ø3/16"	ø1/4", ø5/16", ø3/8"	ø1/4", ø5/16", ø3/8"	ø1/4", ø5/16", ø3/8"	ø1/4", ø5/16", ø3/8"	ø1/4", ø5/16", ø3/8"	ø1/4", ø5/16", ø3/8"	ø1/4", ø5/16", ø3/8"
Controlled flow	Flow rate L/min (ANR)	20	100	180	230	260	390	460	660	790	920	1580	1710
Free flow	Sonic conductance dm ³ /[(s·bar)]	0.06	0.28	0.5	0.64	0.72	1.1	1.3	1.8	2.2	2.6	4.4	4.8
Critical pressure ratio	Controlled flow	0.2	0.2	0.25	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	Free flow	0.4	0.4	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3

Note 1) Flow rate values are measured at 0.5 MPa and 20°C.

Note 2) U10/32 has the same specification as M5.

Elbow type


Applicable tubing O.D. ø2



Universal type



Symbol



Flow Direction Symbols on Body

	Meter-out type	Meter-in type
Indicator symbol		
Symbol		

Caution

Be sure to read this before handling the products.
Refer to page 11 for safety instructions and pages 19 to 22 for flow control equipment precautions.



Made to Order
(Refer to pages 836 and 837 for details.)

830



Speed Controller with One-touch Fitting Elbow Type/Universal Type **AS Series**

How to Order

AS 2 2 0 1 F - 01 - 06 S - - -

Body size

1	M3, M5 standard
2	1/8, 1/4 standard
3	3/8 standard
4	1/2 standard

Type

2	Elbow
3	Universal

Control type

0	Meter-out
1	Meter-in

With One-touch fitting

Thread type

Nil	Metric thread (M3, M5)
Nil	Unified thread (10-32 UNF)
R	R
N	NPT

Lock nut option

Nil	Hexagon lock nut
J	Round lock nut

Made to Order
(Refer to pages 582 and 583 for details.)

Option

Nil	None
S	With seal
N	Electroless nickel plated

*1 If more than one option is required, write option part numbers in the order of "S", "N".
*2 M3, M5, and U10/32 are not available with seals.

Applicable tubing O.D. (Note)

Metric size	Inch size
02	ø2
03	ø3
04	ø4
06	ø6
08	ø8
10	ø10
12	ø12

Port size

M3	M3 x 0.5
M5	M5 x 0.8
U10/32	10-32 UNF
01	1/8
02	1/4
03	3/8
04	1/2

Made to Order
(For details, refer to pages 836, 837 and 838.)


Symbol	Specifications
-X12	Lubricant: Vaseline
-X21	Grease-free (Seal: Fluorine-coated) + Throttle valve (Without check valve)
-X214	Throttle valve (Without check valve)
-X250	Fixed throttle (No needle function)
-X242-J	Metal knob

Note) For applicable tubing O.D. selection, refer to the Model on page 830.
*Use ø1/8" tube.


Needle Valve/Flow Rate Characteristics

Note) The flow rate characteristics are representative values.

**AS1201F-M3, AS1211F-M3
AS1301F-M3, AS1311F-M3
AS1201F-M5-02, AS1211F-M5-02**

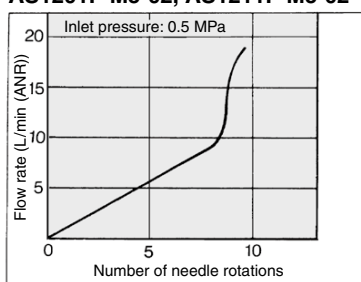


**AS1201F-M5, AS1211F-M5
AS1301F-M5, AS1311F-M5**

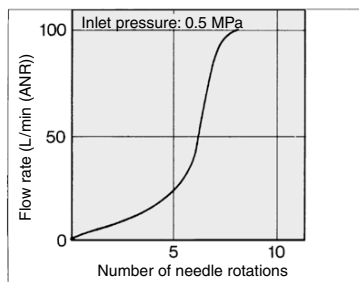


Note) "U10/32" is the same as "M5".


**AS2201F-01, AS2211F-01
AS2301F-01, AS2311F-01**

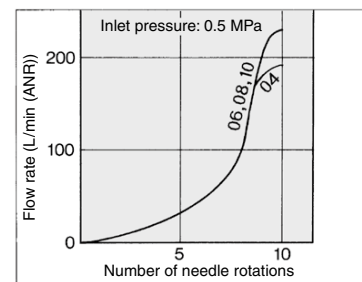


**AS2201F-02, AS2211F-02
AS2301F-02, AS2311F-02**

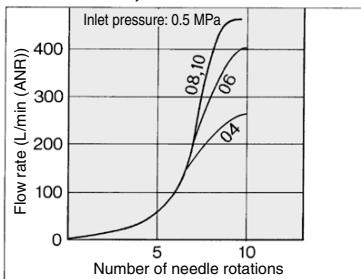

**AS3201F, AS3211F
AS3301F, AS3311F**

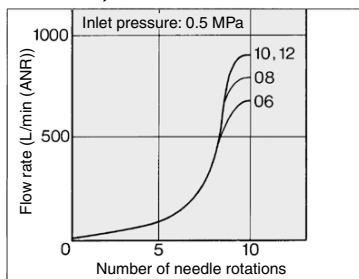

**AS4201F, AS4211F
AS4301F, AS4311F**

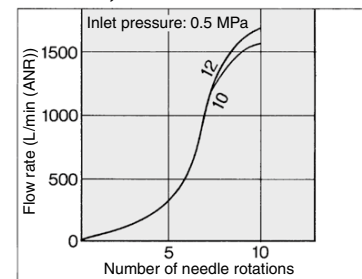


Speed Controller with One-touch Fitting Elbow Type/Universal Type **AS Series**


Construction

Elbow type

Meter-out type AS3201F-02

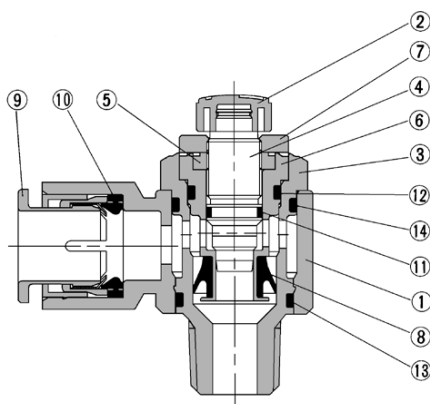


Meter-in type AS3211F-02




Universal type

Meter-out type AS3301F-02

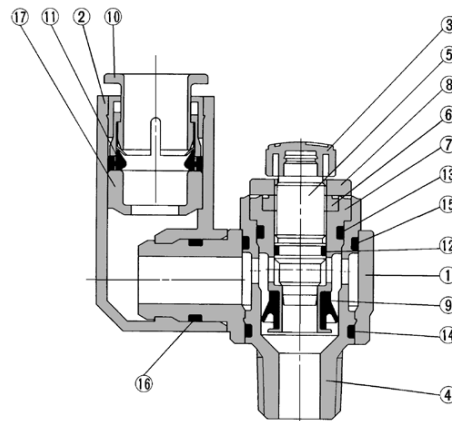

Meter-in type AS3311F-02

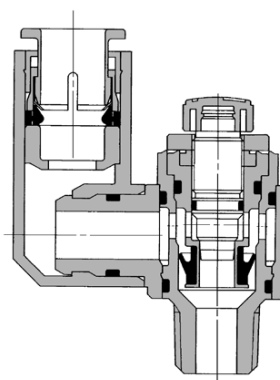

Component Parts

No.	Description	Material	Note
1	Body A	PBT	
2	Handle	PBT ⁽¹⁾	
3	Body B	Brass ⁽²⁾	Electroless nickel plated
4	Needle	Brass	Electroless nickel plated
5	Needle guide	Brass	Electroless nickel plated
6	Seat ring	Brass	⁽³⁾
7	Lock nut	Steel ⁽⁴⁾	Meter-out Zinc chromate plated ^{Note 5)} Meter-in Black zinc chromate plated
8	U-packing	HNBR	
9	Cassette	—	
10	Seal	NBR	
11	O-ring	NBR	
12	O-ring	NBR	
13	O-ring	NBR	
14	O-ring	NBR	
15	Gasket	NBR, Stainless steel	

Note 1) AS12□1F-M3 and AS12□1F-M5-02 are made of electroless nickel plated brass.

Note 2) AS12□1F-M3 is made of stainless steel.

Note 3) AS22□1F, AS32□1F: Electroless nickel plated.

* Excluding applicable tubing O.D. 3/8"

Note 4) The material of the lock nut option-J (round type) is brass. However, note that only the AS22□1F uses steel.

Note 5) The surface treatment of the lock nut option-J (round type) is electroless nickel plating.

Component Parts

No.	Description	Material	Note
1	Body A	PBT	
2	Elbow body	PBT	
3	Handle	PBT ⁽¹⁾	
4	Body B	Brass ⁽²⁾	Electroless nickel plated
5	Needle	Brass	Electroless nickel plated
6	Needle guide	Brass	Electroless nickel plated
7	Seat ring	Brass	⁽³⁾
8	Lock nut	Steel ⁽⁴⁾	Meter-out Zinc chromate plated ^{Note 5)} Meter-in Black zinc chromate plated
9	U seal	HNBR	
10	Cassette	—	
11	Seal	NBR	
12	O-ring	NBR	
13	O-ring	NBR	
14	O-ring	NBR	
15	O-ring	NBR	
16	O-ring	NBR	
17	Spacer	—	
18	Gasket	NBR, Stainless steel	

Note 1) AS13□1F-M3 is made of electroless nickel plated brass.

Note 2) AS13□1F-M3 is made of stainless steel.

Note 3) AS23□1F, AS33□1F: Electroless nickel plated.

* Excluding applicable tubing O.D. 3/8"

Note 4) The material of the lock nut option-J (round type) is brass.


However, note that only the AS23□1F uses steel.

Note 5) The surface treatment of the lock nut option-J (round type) is electroless nickel plating.



AS Series





Elbow Type

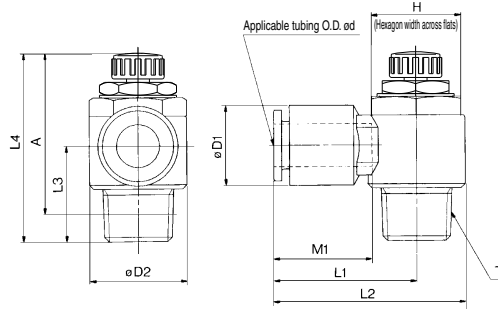

M3 port M5 port U10/32 port



ø2 tubing type AS12□1F-M3-02 AS12□1F-M5-02



Metric Size

Model	Applicable lubing O.D. (d)	T	H ⁽¹⁾	D ⁽¹⁾	D ⁽²⁾	D ⁽³⁾	L ⁽¹⁾	L ⁽²⁾	L ⁽³⁾	L ⁽⁴⁾ (3)		A ⁽²⁾		M ⁽¹⁾	Weight (g)
										Max.	Min.	Max.	Min.		
AS12□1F-M3-02	2	M3 x 0.5	5.5	6	5.2	6	11.4	—	11	26.8	24.3	24.3	21.8	8.8	2.4
AS12□1F-M5-02		M5 x 0.8	7	—	7.5	—	—	—	11.5	27.3	24.8	—	—	—	3
AS12□1F-M3-23	3.2	M3 x 0.5	5.5	8.4	7.2	—	16.1	19.7	10.5	26.6	24.1	24	21.5	12.7	4
AS12□1F-M3-04	4		9.3	—	—	—	—	—	10	—	—	—	—	—	—
AS12□1F-M5-23	3.2	M5 x 0.8	8	8.4	—	—	17.3	22.1	—	—	—	—	—	—	—
AS12□1F-U10/32-23	—	10-32UNF		—	—	—	—	—	12.3	—	—	—	12.7	—	—
AS12□1F-M5-04	4	M5 x 0.8	8	9.3	9.6	—	17.3	22.1	—	28.6	25.8	25	22.2	—	7
AS12□1F-U10/32-04	—	10-32UNF		—	—	—	—	—	—	—	—	—	—	—	—
AS12□1F-M5-06	6	M5 x 0.8	8	11.6	—	—	18.1	22.9	11.7	—	—	—	13.5	—	—
AS12□1F-U10/32-06	—	10-32UNF		—	—	—	—	—	—	—	—	—	—	—	—
AS22□1F-01-23	3.2	1/8	12 (12.7)	9.3	—	—	20.4	27.5	—	—	—	—	12.7	16	—
AS22□1F-01-04	4			9.3	—	—	20.4	27.5	13.4	—	—	—	18.5	19	—
AS22□1F-01-06	6	1/8	12 (12.7)	11.6	14.2	—	20.4	27.5	35.2	30.2	32.1	27.1	13.5	19	—
AS22□1F-01-08	8			15.2	—	—	25.3	32.4	—	—	—	—	18.5	19	—
AS22□1F-01-10	10	1/8	12 (12.7)	18.5	—	—	32.1	39.2	14.1	—	—	—	21	21	—
AS22□1F-02-04	4			10.4	—	—	25.2	34.4	—	—	—	—	16	32	—
AS22□1F-02-06	6	1/4	17 (17.5)	12.8	18.5	—	25.2	34.4	17.7	—	—	—	17	—	—
AS22□1F-02-08	8			15.2	—	—	27.2	36.4	—	39.9	34.9	34.4	18.5	34	—
AS22□1F-02-10	10	1/4	17 (17.5)	18.5	—	—	35.3	44.5	18.3	—	—	—	21	36	—
AS32□1F-02-06	6			12.8	—	—	27.8	39.3	—	—	—	—	17	60	—
AS32□1F-02-08	8	1/2	23	15.2	—	—	29.5	41	—	21.3	48.3	43.3	18.5	63	—
AS32□1F-02-10	10			18.5	—	—	31.8	43.3	—	—	—	—	21	67	—
AS32□1F-02-12	12	1/2	23	20.9	—	—	32.8	44.3	—	—	—	—	22	69	—
AS32□1F-03-06	6			12.8	—	—	27.8	39.3	—	—	—	—	17	55	—
AS32□1F-03-08	8	3/8	23	15.2	—	—	29.5	41	—	19.8	45.4	40.4	18.5	57	—
AS32□1F-03-10	10			18.5	—	—	31.8	43.3	—	—	—	—	21	59	—
AS32□1F-03-12	12	1/2	23	20.9	—	—	32.8	44.3	—	—	—	—	22	61	—
AS42□1F-04-10	10			24	18.5	—	33.6	47.9	—	24.5	56.7	49.2	21	100	—
AS42□1F-04-12	12	1/2	23.8	20.9	28.6	—	35.2	49.5	—	—	—	—	22	101	—

Note 1) () are the dimensions of NPT thread.

Note 2) Reference thread dimensions after installation.

Note 3) Reference dimensions

Inch Size

Model	Applicable tubing O.D. ød	T	H ⁽¹⁾	D1	D2	L1	L2	L3	L4 ⁽³⁾		A ⁽²⁾		M1	Weight (g)
									Max.	Min.	Max.	Min.		
AS12□1F-M3-01	1/8"	M3 x 0.5	5.5	8.4	7.2	16.1	19.7	10.5	26.6	24.1	24	21.5	12.7	4
AS12□1F-M3-03	5/32"		9.3											
AS12□1F-M5-01	1/8"	M5 x 0.8		8.4		17.3	22.1							
AS12□1F-U10/32-01	1/8"	10-32UNF	8		9.6			12.3	28.6	25.8	25	22.2	12.7	7
AS12□1F-M5-03	5/32"	M5 x 0.8		9.3		17.3	22.1							
AS12□1F-U10/32-03	5/32"	10-32UNF												
AS12□1F-M5-05	3/16"	M5 x 0.8	8	11.4		21.3	26.1						16.5	7
AS12□1F-U10/32-05	3/16"	10-32UNF						11.7	28.6	25.8	25	22.2		
AS12□1F-M5-07	1/4"	M5 x 0.8		12		18.3	23.1						13.5	7
AS12□1F-U10/32-07	1/4"	10-32UNF												
AS22□1F-01-01	1/8"	1/8	12 (12.7)	9.3		20.4	27.5							16
AS22□1F-01-03	5/32"			9.3		20.4	27.5						12.7	17
AS22□1F-01-05	3/16"			11.4	14.2	23.1	30.2		35.2	30.2	32.1	27.1	16.5	17
AS22□1F-01-07	1/4"			13.2		23.9	31						18.5	19
AS22□1F-01-09	5/16"			15.2		25.3	32.4	14.1					21	21
AS22□1F-02-03	5/32"	1/4	17 (17.5)	10.4		25.2	34.4						16	
AS22□1F-02-05	3/16"			11.4		24.9	34.2	17.7					17	32
AS22□1F-02-07	1/4"			13.2	18.5	25.2	34.5		39.9	34.9	34.4	29.4	18.5	34
AS22□1F-02-09	5/16"			15.2		27.2	36.4	18.2					21	36
AS22□1F-02-11	3/8"			18.5		35.3	44.5	18.8					21	36
AS22□1F-02-07	1/4"	3/8	19	13.2		27.8	39.3						17	60
AS32□1F-02-09	5/16"			15.2	23	29.5	41	21.3	48.3	43.3	42.8	37.8	18.5	63
AS32□1F-02-11	3/8"			17.9		31.8	43.3						21	67
AS32□1F-03-07	1/4"	1/2	19	13.2		27.8	39.3						17	55
AS32□1F-03-09	5/16"			15.2	23	29.5	41	19.8	45.4	40.4	40.2	35.2	18.5	57
AS32□1F-03-11	3/8"			17.9		31.8	43.3						21	59
AS42□1F-04-11	3/8"	1/2	24 (23.8)	17.9		33.6	47.9		24.5	56.7	49.2	49.6	21	100
AS42□1F-04-13	1/2"			21.7	28.6	35.2	49.5						22	101

Note 1) () are the dimensions of NPT thread.

Note 2) Reference thread dimensions after installation.

Note 3) Reference dimensions



GLOBAL INDUSTRIAL AUTOMATION SOURCING

Ready to source this part?

Ask for availability, pricing and delivery options.

Request a fast quote

Include the product title and any required part number or quantity.

EMAIL

info@apterpower.com

PHONE

+86 18106909650

[CHAT ON WHATSAPP >](#)



[SCAN TO CHAT ON WHATSAPP](#)

PRODUCT: AS3201F-02-06SA / AS Series Meter-Out Elbow Speed Controller with One-Touch Fitting

The enclosed manufacturer pages are reproduced without alteration to technical content.

Apter Power is not an authorized distributor, reseller or representative of the products featured.

Product names, trademarks, brands and logos remain the property of their respective owners.