



IC697MEM717

GE Fanuc Series 90-70 256 KB CMOS Expansion Memory

Product scope

- Provides 256 Kbytes of CMOS expansion memory for compatible Series 90-70 host modules.
- Supports IC697CPU771, IC697CPU772 and IC697PCM711 as documented host modules.
- Installs as a field-replaceable daughter board without consuming an additional rack slot.
- Uses the host CPU or PCM lithium battery to retain memory when rack power is removed.

Manufacturer source

GE Fanuc Series 90-70 Programmable Controller Data Sheet Manual, GFK-0600F; CMOS Expansion Memory data sheet GFK-0160F

The enclosed manufacturer pages identify IC697MEM717 as the 256 Kbyte CMOS expansion-memory option and preserve the installation, battery and compatibility information for CPU 771, CPU 772 and PCM hosts.

Request a fast quote	Product reference	
Email: info@apterpower.com Phone: +86 18106909650 apter.com/inquiry.php	IC697MEM717	

The enclosed manufacturer pages are reproduced without alteration to technical content. External interactive links and unrelated pages are excluded from this web-optimized copy.

Expansion Memory


IC697MEM713/715/717/719

GFK-0160F
August 1997

CMOS Expansion Memory

Features

- Available in 64, 128, 256 and 512 Kbytes
- For expansion of CPU 771, CPU 772, or PCM
- Memory retained by battery on CPU or PCM
- Does not require additional slot
- Configurable for data and program storage
- Error checking by CPU checksum routine
- No tools required for installation
- Field Installable

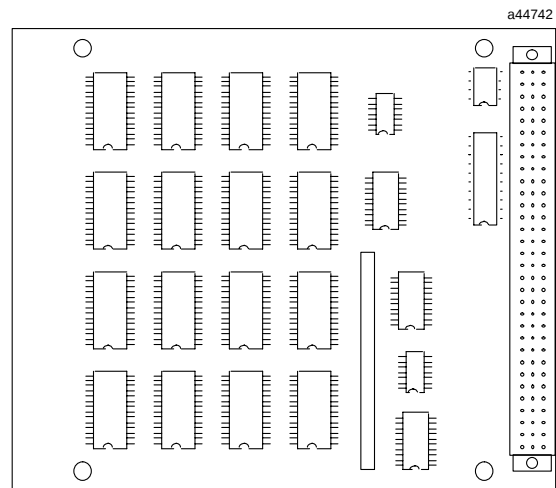

Functions

This CMOS Expansion Memory is available in four versions; 64, 128, 256 and 512 Kbytes. This memory may be used to expand logic and data memory in either the CPU 771 (IC697CPU771) and CPU 772 (IC697CPU772) modules, or the Programmable Co-processor Module (IC697PCM711). It is installed as a daughter board and resides in the same slot as the module it serves. Memory on this board supplements memory available on the base board.

Memory is retained in the event of power loss by the battery on the base board housing.

Logic program memory is continually error-checked by the PLC CPU as a background task.

The PCM error checks storage memory when power is cycled and on hard or soft resets.

© MS-DOS and Windows are registered trademarks of Microsoft Corporation.

Series 90™-70 Programmable Controller Data Sheet Manual
GFK-0600F

32-1

2

Expansion Memory

GFK-0160F
August 1997

CMOS Expansion Memory

Installation

- Installation should not be attempted without referring to the applicable *Programmable Controller Installation Manual* (See reference 4).
- Make sure rack power is off.
- Plug the 64 pin connector into the connector on the base board, and engage snaps.
- Place module in rack.
- Turn power on.

CPU Installation:

- Clear memory using either MS-DOS® or Windows® programming software following instructions in the *Programming Software User's Manual* (See reference 1).

PCM Installation:

- For the PCM follow the instructions in the *Programmable Coprocessor Module Support Software User's Manual* (See reference 3).

Batteries

The Lithium battery (IC697ACC701) is installed as shown in figure 1. This battery maintains user memory when power is removed and operates the calendar clock on the PLC CPU. Be sure to install the new battery before removing the old battery. Specific indication of a low battery state is detailed in References 3 and 4.

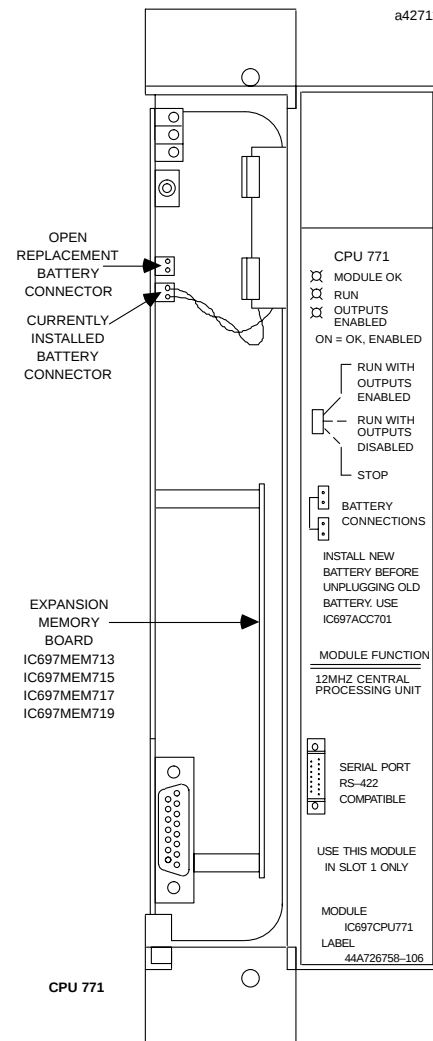


Figure 1. Location of Expansion Memory and Battery on CPU771/772 and PCM

Expansion Memory

3

CMOS Expansion Memory

GFK-0160F
August 1997

Table 1. References

Reference	Title
1	ProgrammingSoftware User's Manual
2	Programmable Controller Reference Manual
3	Programmable Coprocessor Module and Support Software User's Manual
4	Programmable Controller Installation Manual

Table 2. Specifications for IC697MEM713/715/717/719 †

Battery	
Shelflife	10 years at 20° C (68° F)
Memory retention	6 months nominal without applied power.
VME	System designed to support the VME standard C.1

† Refer to GFK-0867B, or later for product standards and general specifications.

Table 3. Ordering Information

Description	Catalog Number
64 Kbyte CMOS Expansion Memory	IC697MEM713
128 Kbyte CMOS Expansion Memory	IC697MEM715
256 Kbyte CMOS Expansion Memory	IC697MEM717
512 Kbyte CMOS Expansion Memory	IC697MEM719
Lithium Battery	IC697ACC701

Note: For Conformal Coat option, or Low Temperature Testing option please consult the factory for price and availability.



GLOBAL INDUSTRIAL AUTOMATION SOURCING

Ready to source this part?

Ask for availability, pricing and delivery options.

Request a fast quote

Include the product title and any required part number or quantity.

EMAIL

info@apterpower.com

PHONE

+86 18106909650



SCAN TO CHAT ON WHATSAPP

REQUEST A QUOTE

PRODUCT: IC697MEM717

Manufacturer pages are reproduced without alteration to technical content.

Apter Power is not an authorized distributor, reseller or representative of the products featured.