


UniOP BKDC-16, BKDL-16 and BKDR-16

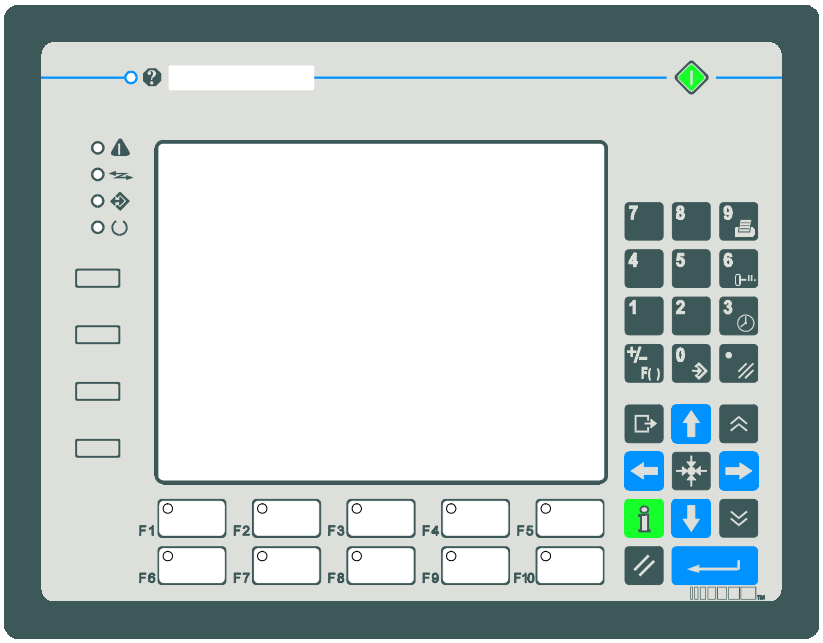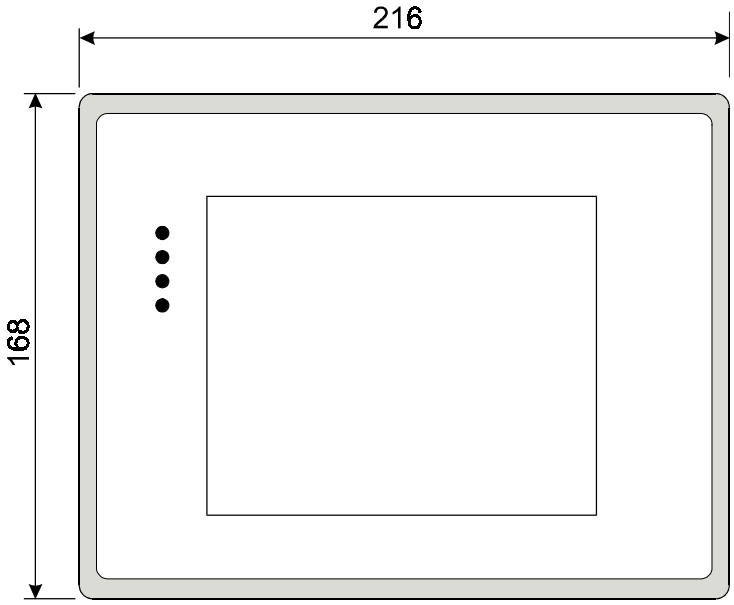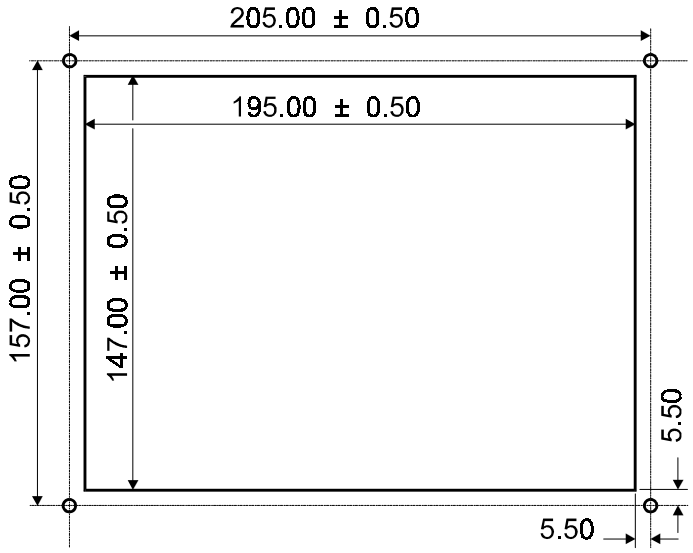

Technical Data

Display	BKDC-16 STN Color 5.6” BKDL-16 Monochrome Electroluminescent 5.6” BKDR-16 Monochrome LCD 5.6”
Graphical resolution	320x240
Keyboard	37 keys (14 function keys + numeric keypad)
User LED	10
Power supply	24 VDC
Program Memory	512 KB Flash EPROM (64 KB reserved for protocol) Expandable to 1 MB
Communication ports	1 RS-232 port (PC/Printer) 1 RS-232, RS-485, CL 20 mA PLC (-0045)
Aux Port	YES
Alarms	1024
Alarm info page	YES
Number of variables per page	Unlimited
Page size	32 rows
Macro Editor	YES
Hardware Clock/Calendar	YES
Historical event list	256
Recipes	16 KB
UniNET Network	SERVER / CLIENT
Password	YES
Printer	YES


216
168


205.00 ± 0.50
195.00 ± 0.50
157.00 ± 0.50
147.00 ± 0.50
5.50
5.50