

Technical Data

Original Instructions



Allen-Bradley

by ROCKWELL AUTOMATION

Programmable Controller Wiring Systems


Bulletin 1492

Topic	Page
Introduction	2
1756 ControlLogix Wiring Systems	4
1769 CompactLogix Wiring Systems	82
1769 CompactLogix 5370 Controllers Wiring Systems	131
1746 SLC500 Wirings Systems	137
1762 and 1764 MicroLogix Wiring Systems Selection	175
Digital IFM Selection	207
Analog AIFM Selection	270
Marking Systems	291
Dimensions	294
Accessories	297
General Wiring System Specifications	298
Replacement Relays	298

1492-XIM4024-16R

1492-RXIM4024-16R


Relay Mater (LED indicating) 40-Pin Master with Sixteen (16) 24V DC Relays

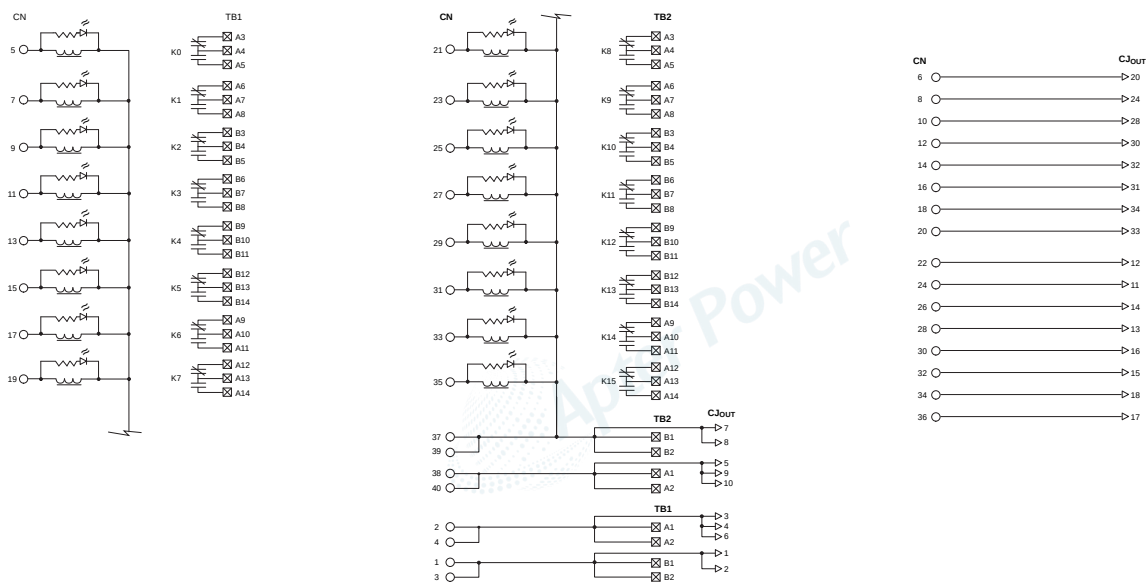

Cat. No.	Voltage Range	Max. Current (Per Circuit)	Max. Current (Per Module)	Dimensions (W x H x D) (in.)	Indicator Circuit Current (Nominal)	Max. Recurring Peak Voltage	Operating Temperature	Operating Humidity	Approx Shipping Weight	Replacement Label Card Cat. No.
1492-XIM4024-16R	20...26V DC	10/12 A	96 A	9.06 x 3.27 x 2.78	2 mA	600 Vp	0...60 C	5...95%	1.79 lb. 871 g.	W4600633201
1492-RXIM4024-16R				9.45 x 3.27 x 2.78						

1492-XIM4024-16RF

Relay Master (LED Indicating) 40-Pin Master with Sixteen (16) 24V DC Relays with Fusing

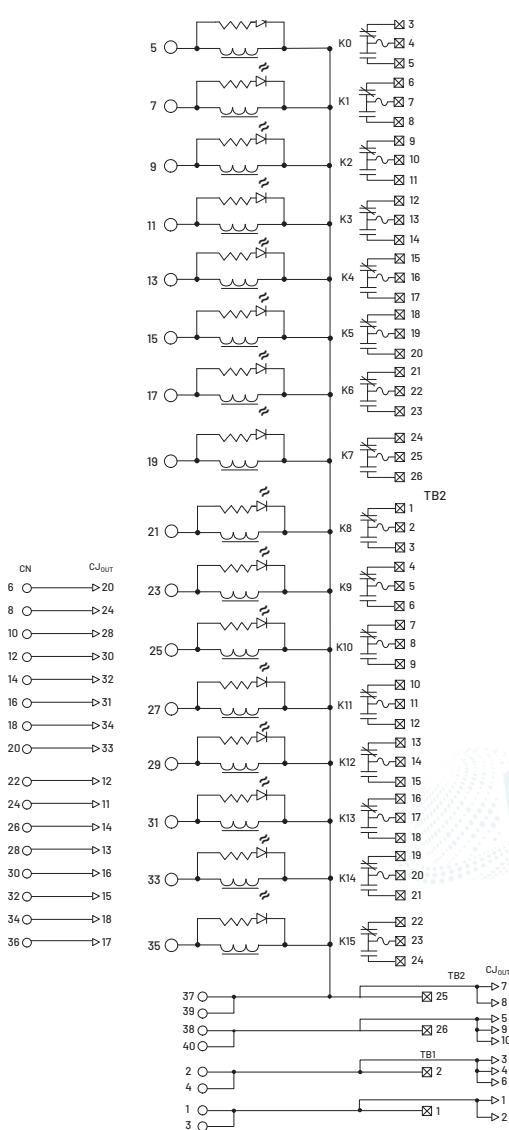

Cat. No.	Voltage Range	Max. Current (Per Circuit)	Max. Current (Per Module)	Dimensions (W x H x D) (in.)	Indicator Circuit Current (Nominal)	Max. Recurring Peak Voltage	Operating Temperature	Operating Humidity	Approx Shipping Weight	Replacement Label Card Cat. No.
1492-XIM4024-16RF	85...132V AC/DC	2 A	12 A	7.09 x 3.27 x 2.78	1.5 mA	600 Vp	0...60 C	5...95%	1.18 lb. (536 g.)	W4600633301