Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

DATA SHEET

vibro-meter®

TQ902/TQ912, EA902 and IQS900 proximity measurement chains



TQ902 sensor
(standard mount)



TQ912 sensor
(reverse mount)



IQS900
signal conditioner

(Images not to scale)

KEY FEATURES AND BENEFITS

- From the vibro-meter® product line
- Non-contact measurement based on eddy-current principle
- Available in standard versions and Ex versions certified for use in hazardous areas (potentially explosive atmospheres)
- Conforms to API 670 5th edition
- 1, 5 and 10 m measurement chains
- Temperature-compensated design
- Voltage output or current output with short-circuit protection
- Current-signal transmission over distances up to 1 km
- Frequency response:
  DC to 20 kHz (−3 dB)
- Linear measurement range:
  2 or 4 mm
- Temperature range (sensor):
  −40 to 180°C

KEY FEATURES AND BENEFITS *(continued)*

- Optional diagnostic circuitry detects sensor, cabling and/or signal conditioner problems
- Suitable for use in functional safety contexts: SIL 2 in accordance with IEC 61508 and Cat 1 PL c in accordance with ISO 13849
- IQS900: Removable screw-terminal connectors and DIN-rail mounting

APPLICATIONS

- Shaft relative vibration and gap/position measurement chains for machinery protection and/or condition monitoring
- Ideal for use with VM600^{Mk2}/VM600 and VibroSmart® machinery monitoring systems
- API 670 applications
- Safety-related applications
- Speed (tachometer) sensor/measurement chain for overspeed detection system (ODS) applications

Information contained in this document may be subject to export control regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant export control regulations. ECN N/A.

Meggitt SA, Route de Moncor 4, Case postale, 1701 Fribourg, Switzerland

Tel: +41 26 407 11 11
Fax: +41 26 407 13 01
energy@ch.meggitt.com
www.meggittsensing.com/energy
www.meggitt.com

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

DESCRIPTION

Introduction

The TQ902/TQ912, EA902 and IQS900 form proximity measurement chains, from Meggitt's vibro-meter® product line.

TQ9xx-based proximity measurement chains allow contactless measurement of the relative displacement of moving machine elements, and provide an output signal proportional to the distance between the sensor tip and the target. Accordingly, these measurement chains are ideally suited for measuring the relative vibration and axial position of rotating machine shafts, such as those found in steam, gas and hydraulic turbines, as well as in alternators, turbo-compressors and pumps.

A TQ9xx-based proximity measurement chain consists of a TQ9xx proximity sensor, an optional EA90x extension cable and an IQS900 signal conditioner, configured for a particular industrial application. The EA90x extension cable is used to effectively lengthen the front-end, as required. Together, these form a calibrated proximity measurement chain in which each component is interchangeable.

The IQS900 signal conditioner is a versatile and configurable device that performs all required signal processing and generates the output signal (current or voltage) for input to a machinery monitoring system such as a VM600^{Mk2}/VM600 or VibroSmart®. In addition, the IQS900 supports optional diagnostic circuitry (that is, built-in self-test (BIST)) that automatically detects and remotely indicates problems with a measurement chain.

TQ902/TQ912 sensors and cabling

The active part of a TQ9xx proximity sensor is a coil of wire that is moulded inside the tip of the device, made of PPS (polyphenylene sulfide), a high-performance, high-temperature engineering thermoplastic. The sensor body is made of stainless steel. The target material must, in all cases, be metallic.

The TQ902 and TQ912 proximity sensors are essentially the same except that the TQ902 is intended for standard-mount and the TQ912 is for reverse-mount applications. Both sensor bodies are available with metric or imperial threads and have an integral coaxial cable terminated with a self-locking miniature coaxial connector.
A TQ9xx sensor's integral cable and the EA90x extension cables are available in various lengths, which can be combined to obtain a particular total system length (TSL) for an application.

Optional interconnection protectors (IP172), junction boxes (JB118) and other housings are available for the mechanical and environmental protection of the connection between a TQ9xx sensor's integral cable and an EA90x extension cable.

IQS900 signal conditioner

The IQS900 signal conditioner contains a high-frequency modulator/demodulator that supplies a driving signal to a TQ9xx sensor. This generates an electromagnetic field in the tip of the sensor, which generates eddy-currents in the metallic target. When the target moves, the eddy-currents change, which causes a change in the electrical characteristics of the TQ9xx that the signal conditioner converts into a signal that is proportional to the distance to the target.

The IQS900's output is an analogue signal consisting of a dynamic component (AC) that corresponds to the measured vibration (displacement) and a quasi-static component (DC) that corresponds to the measured gap. The output can be configured as a current or a voltage signal, suitable for transmission to a monitoring system via current (2-wire) or voltage (3-wire) transmission cables, respectively.

For an IQS900 signal conditioner with optional diagnostics, the quasi-static DC component also functions as a diagnostic indicator. That is, the IQS900's diagnostic circuitry continuously checks the integrity of the measurement chain and will drive the measurement/diagnostic component (DC) outside of its normal operating range to indicate a problem with the sensor, the cabling and/or the signal conditioner itself.

For test purposes, the IQS900 includes a "raw" voltage output signal and a test input signal that allow the measurement chain/system operation to be tested in situ, thereby simplifying commissioning and troubleshooting.

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 2 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

DESCRIPTION *(continued)*

Application information

An IQS900 signal conditioner with diagnostics automatically and remotely indicates the health/status of a TQ9xx-based measurement chain so you always know when measurements can be trusted. This helps to ensure that machinery is operated safely and reliably, extending its life and reducing costs.

Equally important, TQ9xx-based measurement chains using an IQS900 with diagnostics are SIL 2 "by design" so they bring enhanced reliability and significant risk reduction, making them suitable for use in safety-related applications (functional safety contexts).

Further, TQ9xx-based measurement chains are form, fit and functionally equivalent replacements that match or better the outstanding performance of TQ4xx-based measurement chains. Each component is interchangeable, so existing TQ4xx-based proximity measurement chains can be quickly and easily replaced or upgraded. For example, an IQS900 signal conditioner without diagnostics is a direct replacement for an IQS45x in most TQ4xx-based measurement chains.

Note: A TQ9xx-based measurement chain using an IQS900 configured with a current output and a GSI127 galvanic separation unit, allows transmission over distances up to 1 km – longer than any other solution.

For specific applications, contact your local Meggitt representative.

SPECIFICATIONS

Overall proximity measurement chain

Operation

Sensitivity

• Ordering option code B21	: 8 mV/µm (203.2 mV/mil)
• Ordering option code B22	: 2.5 µA/µm (63.5 µA/mil)
• Ordering option code B23	: 4 mV/µm (101.6 mV/mil)
• Ordering option code B24	: 1.25 µA/µm (31.75 µA/mil)
Linear measurement range (typical)	
• Ordering option code B21	: 0.15 to 2.15 mm, corresponding to a −1.6 to −17.6 V output
• Ordering option code B22	: 0.15 to 2.15 mm, corresponding to a −15.5 to −20.5 mA output
• Ordering option code B23	: 0.3 to 4.3 mm, corresponding to a −1.6 to −17.6 V output
• Ordering option code B24	: 0.3 to 4.3 mm, corresponding to a −15.5 to −20.5 mA output
Linearity	: See **Performance curves on page 9 and on page 10**
Frequency response	: DC to 20 kHz (−3 dB)
Interchangeability of elements	: All components in chain are interchangeable

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 3 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

SPECIFICATIONS *(continued)*

Environmental

Potentially explosive atmospheres

Available in Ex approved versions for use in hazardous areas (**ordering option code A5**)

Protection mode		EA90x	IQS9xx
Europe			
ec (Gas)	Ⓔx II 3 G (Zone 2) Ex ec IIC T6…T3 Gc LCIE 21 ATEX 1004 X T6: For −40°C ≤ T_{amb} ≤ +75°C T5: For −40°C ≤ T_{amb} ≤ +90°C T4: For −40°C ≤ T_{amb} ≤ +125°C T3: For −40°C ≤ T_{amb} ≤ +180°C	Suitable for Zones 0, 1, 2*	Ⓔx II 3 G (Zone 2) Ex ec IIC T6 or T5 Gc LCIE 21 ATEX 1004 X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Gas)	Suitable for Zones 0, 1, 2. **Simple apparatus***.	Suitable for Zones 0, 1, 2*	Ⓔx II 1 G (Zones 0, 1, 2) Ex ia IIC T6 or T5 Ga LCIE 21 ATEX 3002 X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Dust)	Suitable for Zones 20, 21, 22. **Simple apparatus***.	Suitable for Zones 20, 21, 22*	Ⓔx II 1 D (Zones 20, 21, 22) Ex ia IIIC T_{200} 80°C…T_{200} 115°C Da LCIE 21 ATEX 3002 X T_{200} 80°C: For −40°C ≤ T_{amb} ≤ +50°C T_{200} 95°C: For −40°C ≤ T_{amb} ≤ +65°C T_{200} 115°C: For −40°C ≤ T_{amb} ≤ +85°C
*Means that the product is not required to be certified. Meggitt SA assumes respect of the Ex standards for these components when connected to an Ex certified IQS9xx.			

International			
ec (Gas)	Ex ec IIC T6…T3 Gc IECEx LCIE 21.0005X T6: For −40°C ≤ T_{amb} ≤ +75°C T5: For −40°C ≤ T_{amb} ≤ +90°C T4: For −40°C ≤ T_{amb} ≤ +125°C T3: For −40°C ≤ T_{amb} ≤ +180°C	Suitable for Zones 0, 1, 2*	Ex ec IIC T6 or T5 Gc IECEx LCIE 21.0005X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Gas)	Suitable for Zones 0, 1, 2. **Simple apparatus***.	Suitable for Zones 0, 1, 2*	Ex ia IIC T6 or T5 Ga IECEx LCIE 21.0006X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Dust)	Suitable for Zones 20, 21, 22. **Simple apparatus***.	Suitable for Zones 20, 21, 22*	Ex ia IIIC T_{200} 80°C…T_{200} 115°C Da IECEx LCIE 21.0006X T_{200} 80°C: For −40°C ≤ T_{amb} ≤ +50°C T_{200} 95°C: For −40°C ≤ T_{amb} ≤ +65°C T_{200} 115°C: For −40°C ≤ T_{amb} ≤ +85°C
*Means that the product is not required to be certified. Meggitt SA assumes respect of the Ex standards for these components when connected to an Ex certified IQS9xx.			

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 4 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

SPECIFICATIONS *(continued)*

Protection mode	TQ9xx	EA90x	IQS9xx
North America			
ec (Gas)	Class I, Division 2, Groups A, B, C, D T6…T3 Ex ec IIC T6…T3 Gc Class I, Zone 2, AEx ec IIC T6…T3 Gc cCSAus 80084516	Suitable for Zones 0, 1, 2*	Class I, Division 2, Groups A, B, C, D T6…T5 Ex ec IIC T6…T5 Gc Class I, Zone 2, AEx ec IIC T6…T5 Gc cCSAus 80084516
ia (Gas)	Suitable for Zones 0, 1, 2. **Simple apparatus***.	Suitable for Zones 0, 1, 2*	IS Class I, Division 1, Groups A, B, C, D T6 or T5 Ex ia IIC T6 or T5 Ga Class I, Zone 0, AEx ia IIC T6 or T5 Ga cCSAus 80084516
ia (Dust)	Suitable for Zones 20, 21, 22. **Simple apparatus***.	Suitable for Zones 20, 21, 22*	Class II, Division 1, Groups E, F, G T80°C…T115°C Ex ia IIIC T80°C…T115°C Da Zone 20, AEx ia IIIC T80°C…T115°C Da cCSAus 80084516
*Means that the product is not required to be certified. Meggitt SA assumes respect of the Ex standards for these components when connected to an Ex certified IQS9xx.			

South Korea			
ec (Gas)	Ex ec IIC T6…T3 Gc KGS 21-GA4BO-0354X T6: For −40°C ≤ T_{amb} ≤ +75°C T5: For −40°C ≤ T_{amb} ≤ +90°C T4: For −40°C ≤ T_{amb} ≤ +125°C T3: For −40°C ≤ T_{amb} ≤ +180°C	Suitable for Zones 0, 1, 2*	Ex ec IIC T6…T5 Gc KGS 21-GA4BO-0355X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Gas)	Suitable for Zones 0, 1, 2. **Simple apparatus***.	Suitable for Zones 0, 1, 2*	Ex ia IIC T6 or T5 Ga KGS 21-GA4BO-0353X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Dust)	Suitable for Zones 20, 21, 22. **Simple apparatus***.	Suitable for Zones 20, 21, 22*	Ex ia IIIC T_{200} 80°C…T_{200} 115°C Da KGS 21-GA4BO-0352X T_{200} 80°C: For −40°C ≤ T_{amb} ≤ +50°C T_{200} 95°C: For −40°C ≤ T_{amb} ≤ +65°C T_{200} 115°C: For −40°C ≤ T_{amb} ≤ +85°C
*Means that the product is not required to be certified. Meggitt SA assumes respect of the Ex standards for these components when connected to an Ex certified IQS9xx.			

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 5 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

SPECIFICATIONS *(continued)*

Protection mode	TQ9xx	EA90x	IQS9xx
United Kingdom**			
ec (Gas)	Ⓔx II 3 G (Zone 2) Ex ec IIC T6…T3 Gc CML 21 UKEX 4549 X T6: For −40°C ≤ T_{amb} ≤ +75°C T5: For −40°C ≤ T_{amb} ≤ +90°C T4: For −40°C ≤ T_{amb} ≤ +125°C T3: For −40°C ≤ T_{amb} ≤ +180°C	Suitable for Zones 0, 1, 2*	Ⓔx II 3 G (Zone 2) Ex ec IIC T6 or T5 Gc CML 21 UKEX 4549 X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Gas)	Suitable for Zones 0, 1, 2. **Simple apparatus***.	Suitable for Zones 0, 1, 2*	Ⓔx II 1 G (Zones 0, 1, 2) Ex ia IIC T6 or T5 Ga CML 21 UKEX 2548 X T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Dust)	Suitable for Zones 20, 21, 22. **Simple apparatus***.	Suitable for Zones 20, 21, 22*	Ⓔx II 1 D (Zones 20, 21, 22) Ex ia IIIC T_{200} 80°C…T_{200} 115°C Da CML 21 UKEX 2548 X T_{200} 80°C: For −40°C ≤ T_{amb} ≤ +50°C T_{200} 95°C: For −40°C ≤ T_{amb} ≤ +65°C T_{200} 115°C: For −40°C ≤ T_{amb} ≤ +85°C
*Means that the product is not required to be certified. Meggitt SA assumes respect of the Ex standards for these components when connected to an Ex certified IQS9xx. **Not engraved/marked on the products.			

Russian Federation			
ec (Gas)	2Ex e IIC T6…T3 Gc X EAЭC RU C-CH.AД07.B.03744/21 T6: For −40°C ≤ T_{amb} ≤ +75°C T5: For −40°C ≤ T_{amb} ≤ +90°C T4: For −40°C ≤ T_{amb} ≤ +125°C T3: For −40°C ≤ T_{amb} ≤ +180°C	Suitable for Zones 0, 1, 2*	2Ex e IIC T6…T5 Gc X EAЭC RU C-CH.AД07.B.03744/21 T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Gas)	Suitable for Zones 0, 1, 2. **Simple apparatus***.	Suitable for Zones 0, 1, 2*	0Ex ia IIC T6…T5 Ga X EAЭC RU C-CH.AД07.B.03744/21 T6: For −40°C ≤ T_{amb} ≤ +70°C T5: For −40°C ≤ T_{amb} ≤ +85°C
ia (Dust)	Suitable for Zones 20, 21, 22. **Simple apparatus***.	Suitable for Zones 20, 21, 22*	Ex ia IIIC T_{200} 80°C…T_{200} 115°C Da X EAЭC RU C-CH.AД07.B.03744/21 T_{200} 80°C: For −40°C ≤ T_{amb} ≤ +50°C T_{200} 95°C: For −40°C ≤ T_{amb} ≤ +65°C T_{200} 115°C: For −40°C ≤ T_{amb} ≤ +85°C
*Means that the product is not required to be certified. Meggitt SA assumes respect of the Ex standards for these components when connected to an Ex certified IQS9xx.			

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 6 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

SPECIFICATIONS *(continued)*

⚠ **For specific parameters of the mode of protection concerned and special conditions for safe use, refer to the Ex certificates that are available from Meggitt SA.**

⚠ **For an IQS9xx signal conditioner with protection mode "Ex ec" located in an Ex Zone 2, the user must ensure that the IQS9xx is installed in an industrial housing or enclosure that ensures a protection rating of at least IP54 (or equivalent).**

⚠ **For the most recent information on the Ex certifications that are applicable to this product, refer to the *Ex product register (PL-1511) document* that is available from Meggitt SA.**

Approvals

Conformity	: European Union (EU) declaration of conformity (CE marking). United Kingdom (UKCA) declaration of conformity. EAC marking, Eurasian Customs Union (EACU) certificate/ declaration of conformity
Electromagnetic compatibility (EMC)	: EN 61000-6-2:2005. EN 61000-6-4:2007 + A1:2011. EN 61326-1:2013. EN 61326-3-2:2008 (SIL).
Electrical safety	: EN/IEC 61010-1:2010. CAN/CSA C22.2 61010-1-12 / UL 61010-1:2012.
Environmental management	: RoHS compliant (2011/65/EU)
Hazardous areas	: Ex approved versions (see **Potentially explosive atmospheres on page 4**)
Functional safety	: SIL 2 in accordance with IEC 61508-1:2010 and IEC 61508-2:2010. Cat 1 PL c in accordance with ISO 13849-1:2015.
Machinery protection systems	: API 670 5th edition compliant
Russian federal agency for technical regulation and metrology (Rosstandart)	: Pattern approval certificate No 60859-15

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 7 / 21

SPECIFICATIONS *(continued)*

System (chain) calibration

Calibration temperature	: +23°C ±5°C
Target material	: VCL 140 steel (1.7225)

Note: For applications using a non-standard or special target material, performance curves can be generated and supplied. Contact Meggitt SA for further information.

Total system (chain) length

The total system length (TSL) is the sum of the length of the TQ9xx sensor's integral cable and the length of the EA90x extension cable. For TQ902/TQ912, EA902 and IQS900 proximity measurement chains, the supported TSLs are obtained from the following different combinations of cables.

Total system (chain) lengths

• 1 m	: 1.0 m integral cable with no extension cable
• 5 m	: 0.5 m integral cable + 4.5 m extension cable. 1.0 m integral cable + 4.0 m extension cable. 1.5 m integral cable + 3.5 m extension cable. 2.0 m integral cable + 3.0 m extension cable. 5.0 m integral cable with no extension cable.
• 10 m	: 0.5 m integral cable + 9.5 m extension cable. 1.0 m integral cable + 9.0 m extension cable. 1.5 m integral cable + 8.5 m extension cable. 2.0 m integral cable + 8.0 m extension cable. 5.0 m integral cable + 5.0 m extension cable. 10.0 m integral cable with no extension cable.

Note: The combination of cables selected for a particular total system (chain) length depends on the application. For example, to obtain the optimum location for the separation between the integral and extension cables or to eliminate the requirement for an extension cable.

Total system (chain) length trimming

Due to the characteristics of the coaxial cable, an "electrical trimming" of the nominal length of extension cables is necessary to optimize the system performance and the sensor interchangeability.

TSL for a 1 m measurement chain	: 0.9 m min.
TSL for a 5 m measurement chain	: 4.4 m min.
TSL for a 10 m measurement chain	: 8.8 m min.

In-situ test support

Raw output	: The raw output (RAW/COM) provides a "raw" voltage output signal that corresponds to the internal signals of the IQS900 signal conditioner, even if the IQS900 is configured with a current output. This allows the measurement chain/system operation from sensor to signal conditioner to be easily verified in situ (see **Raw output (RAW/COM) on page 12**).
Test input	: The test input (TEST/COM) allows a voltage input signal to be injected at the input to the IQS900 signal conditioner in order to test the IQS900 itself and/or cabling to the monitoring system. This allows the measurement chain/system operation from signal conditioner to monitoring system to be easily verified in situ (see **Test input (TEST/COM) on page 13**).

Note: See **Connectors on page 14** and refer to the *Proximity measurement chains using TQ9xx proximity sensors installation manual* for further information

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 8 / 21

Enabling the Extraordinary
To Fly To Power To Live


MEGGiTT

SPECIFICATIONS *(continued)*

Performance curves for TQ902 or TQ912 with IQS900 – 2 mm measurement range

Typical gap error (µm)
(Referenced to 8 mV/µm (2.5 µA/µm) line)

Typical sensitivity error (%)
(Referenced to 8 mV/µm (2.5 µA/µm))

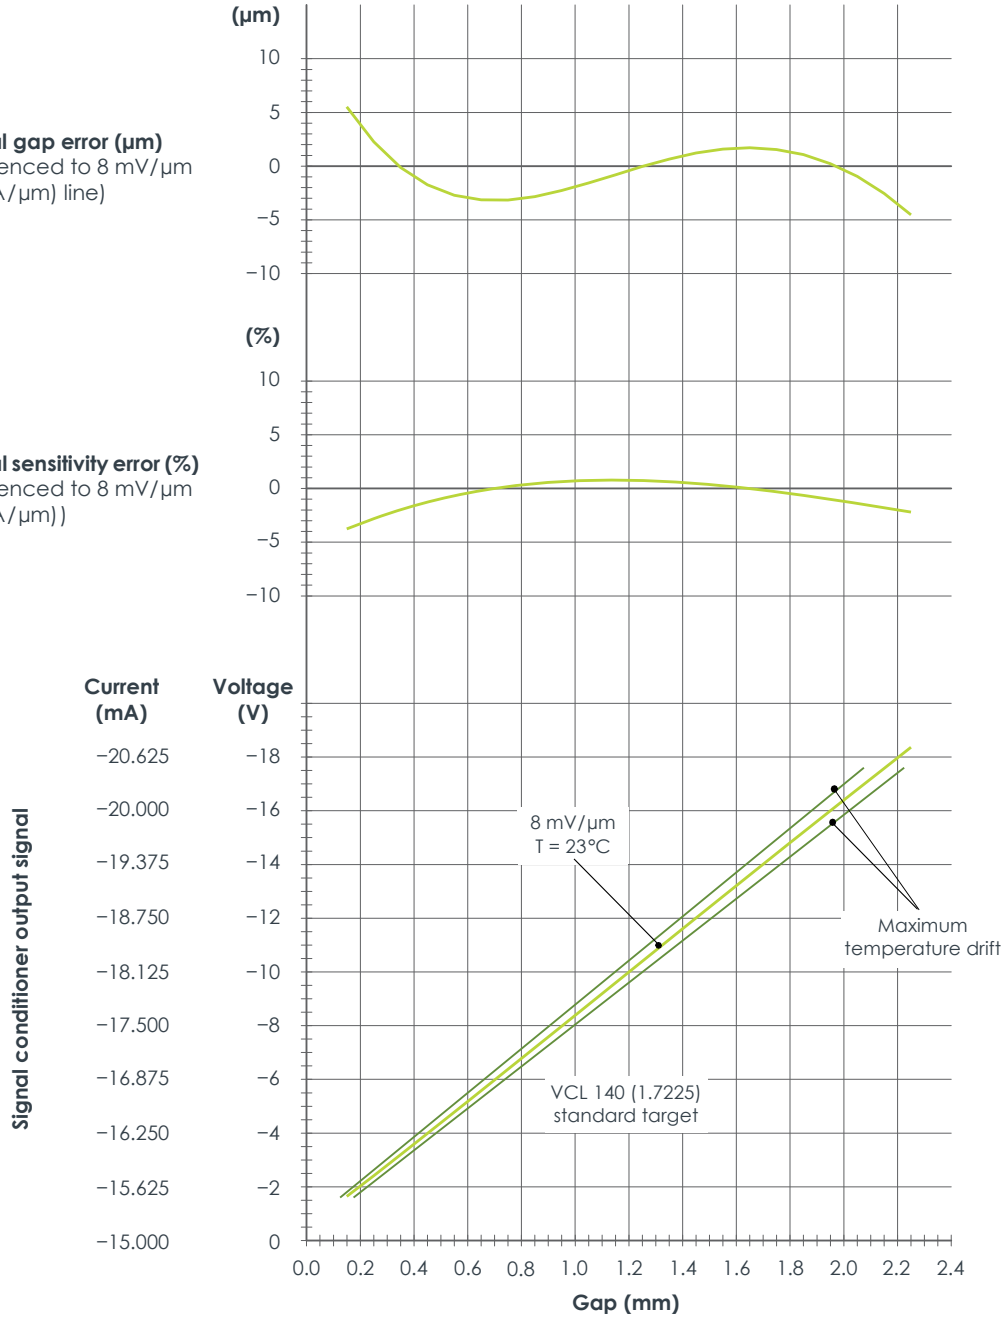

Proximity sensor:	TQ902 or TQ912
Signal conditioner:	IQS900 (ordering option code B21 or B22)
Standard target material:	VCL 140 (1.7225)
Equivalent materials:	A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140


info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 9 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

SPECIFICATIONS *(continued)*

Performance curves for TQ902 or TQ912 with IQS900 – 4 mm measurement range

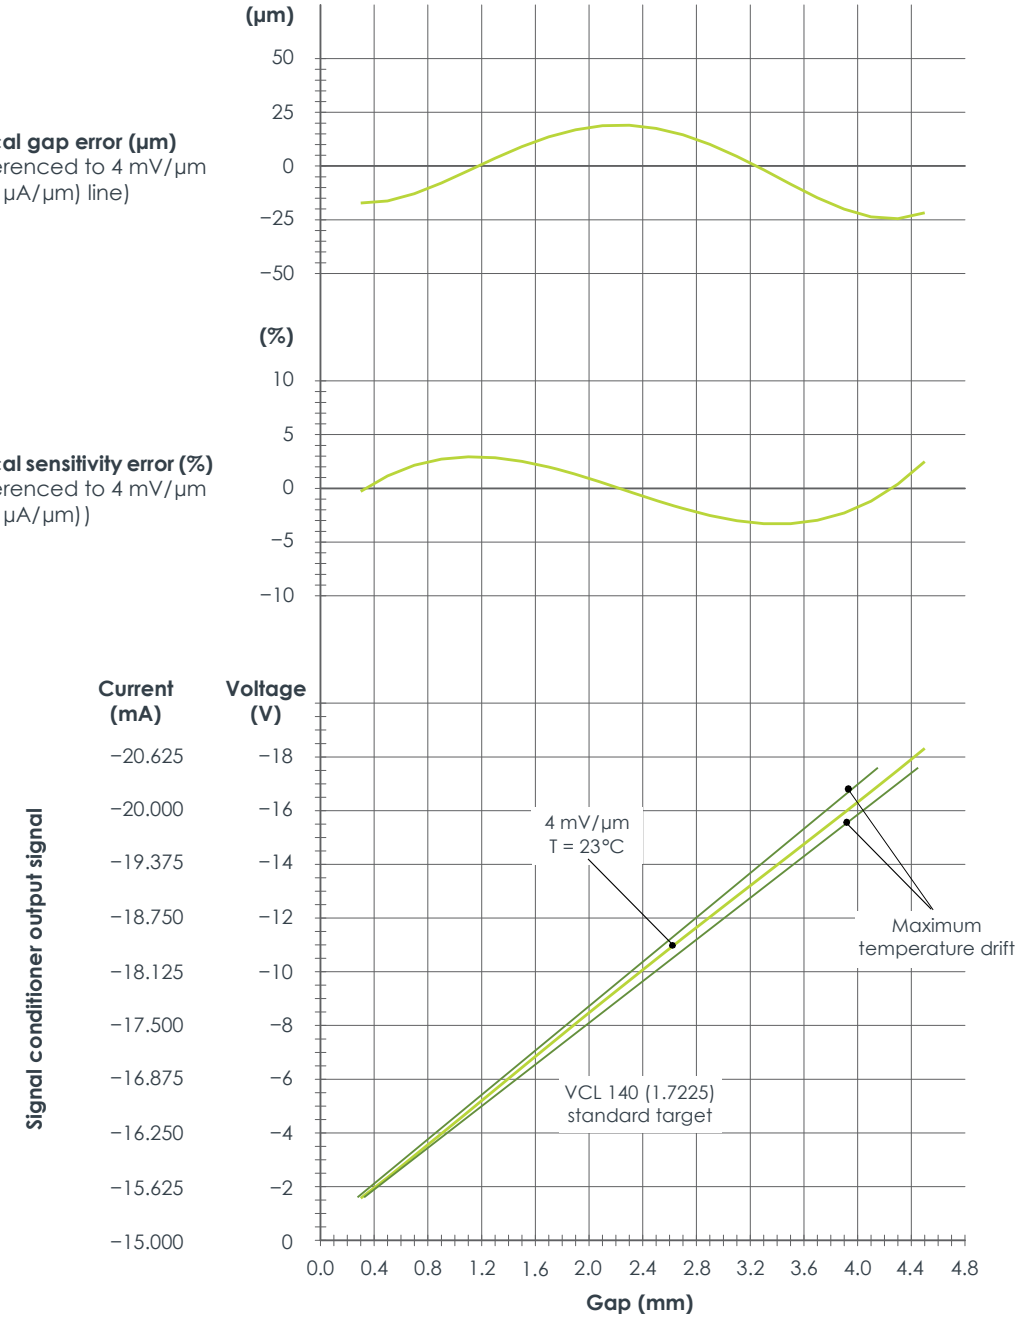

Proximity sensor:	TQ902 or TQ912
Signal conditioner:	IQS900 (ordering option code B23 or B24)
Standard target material:	VCL 140 (1.7225)
Equivalent materials:	A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140


info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 10 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

MECHANICAL DRAWINGS AND ORDERING INFORMATION

TQ902 proximity sensor

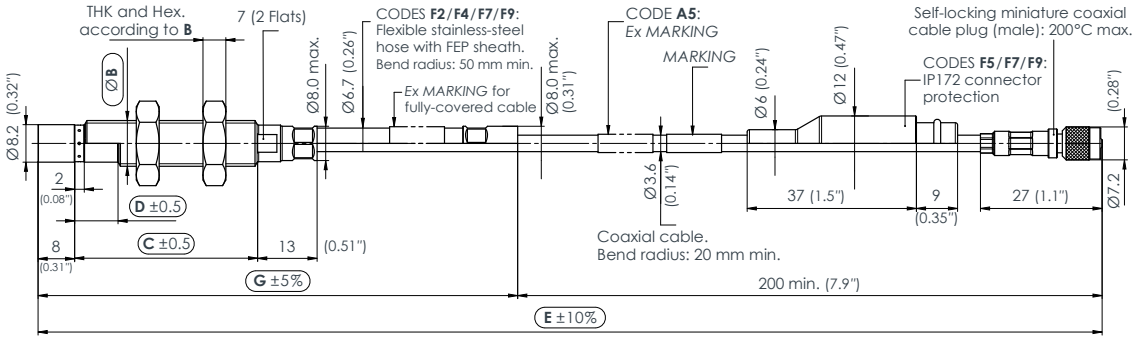

Ordering number:

111 - 902 - 000 - 011 - A [ ] - B [ ] - C [ ] - D [ ] - E [ ] - F [ ] - G [ ] - H [ ]

Environment (A)	
Standard	1
Explosive (Ex)	5

Hex.	THK	Body thread (B)	
17	5	M10 × 1	1
22	7	M14 × 1.5	2
24	8	M16 × 1.5	3
9/16"	7/32"	3/8"-24UNF	6
15/16"	3/8"	5/8"-18UNF	7
3/4"	5/16"	1/2"-20UNF	8

Body length (C)	
Each 1 mm, from 20 to 250 mm	
20 mm min.	20
250 mm max.	250

Unthreaded length (D)	
Each 1 mm, from 2 to 230 mm	
2 mm min.	2
230 mm max.	230

Integral cable length (E)	
500 mm ±50 mm	500
1000 mm ±100 mm	1000
1500 mm ±150 mm	1500
2000 mm ±200 mm	2000
5000 mm ±500 mm	5000
10000 mm ±1000 mm	10000

Optional protection (F) [1]		
	Cable	Connector
0	None	None
2	Flexible hose with FEP sheath	None
4	Movable flexible hose with FEP sheath	None
5	None	IP172
7	Flexible hose with FEP sheath	IP172
9	Movable flexible hose with FEP sheath	IP172

Flexible hose length (G) [1]	
Each 100 mm, from 0 to 9800 mm	
0	None
100	100 mm min.
9800	9800 mm max.

Total system length (H)	
01	1 m
05	5 m
10	10 m

Notes
All dimensions are in mm (in) unless otherwise stated.
1. When optional protection such as a flexible stainless-steel hose with FEP sheath is ordered:
Flexible hose length (G) min. = Body length (C) + 80 mm.
Flexible hose length (G) max. = Integral cable length (E) − 200 mm, for an integral cable that is protected to the maximum extent possible ("fully-covered cable").


info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 15 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

MECHANICAL DRAWINGS AND ORDERING INFORMATION *(continued)*

TQ912 proximity sensor

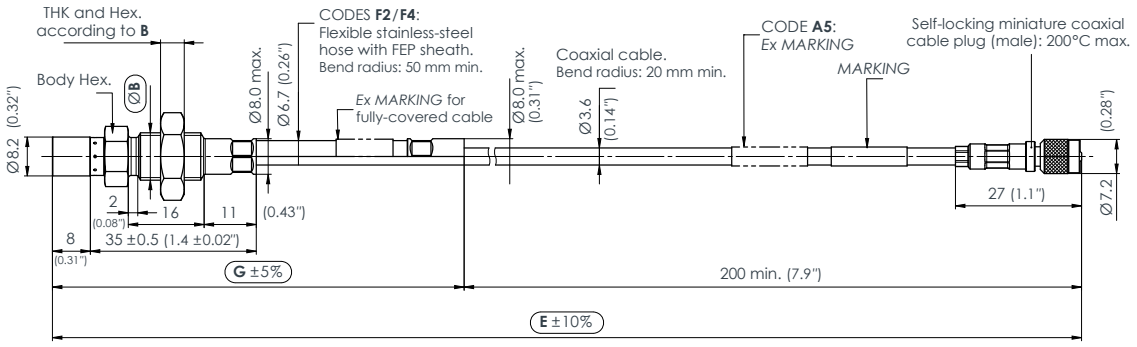

Ordering number:

111 - 912 - 000 - 011 - A [ ] B [ ] E [ ] F [ ] G [ ] H [ ]

Environment (A)	
Standard	1
Explosive (Ex)	5

Hex.	Th	Body Hex.	Body thread (B)	
17	5	11	M10 × 1	1
9/16"	7/32"	7/16"	3/8"-24UNF	6

Integral cable length (E)	
500 mm ±50 mm	500
1000 mm ±100 mm	1000
1500 mm ±150 mm	1500
2000 mm ±200 mm	2000
5000 mm ±500 mm	5000
10000 mm ±1000 mm	10000

Total system length (H)	
01	1 m
05	5 m
10	10 m

Flexible hose length (G) [1]	
Each 100 mm, from 0 to 9800 mm	
0	None
100	100 mm min.
9800	9800 mm max.

Optional protection (F) [1]		
	Cable	Connector
0	None	None
2	Flexible hose with FEP sheath	None
4	Movable flexible hose with FEP sheath	None

Notes
All dimensions are in mm (in) unless otherwise stated.
1. When optional protection such as a flexible stainless-steel hose with FEP sheath is ordered:
Flexible hose length (G) max. = Integral cable length (E) − 200 mm, for an integral cable that is protected to the maximum extent possible ("fully-covered cable").


info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 16 / 21

Enabling the Extraordinary
To Fly To Power To Live

MEGGiTT

MECHANICAL DRAWINGS AND ORDERING INFORMATION *(continued)*

EA902 extension cable

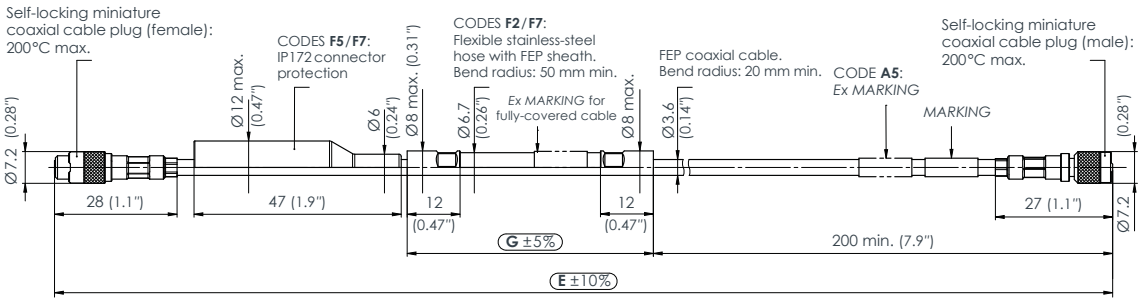

Ordering number:

913 - 902 - 000 - 011 - A E F G

Environment (A)	
Standard	1
Explosive (Ex)	5

Flexible hose length (G) [2]	
Each 100 mm, from 0 to 9300 mm.	
0	None
100	100 mm min.
9300	9300 mm max.

Extension cable length (E) [1]	
3000 mm ±300 mm	3000
3500 mm ±350 mm	3500
4000 mm ±400 mm	4000
4500 mm ±450 mm	4500
5000 mm ±500 mm	5000
8000 mm ±800 mm	8000
8500 mm ±850 mm	8500
9000 mm ±900 mm	9000
9500 mm ±950 mm	9500

Optional protection (F) [2]		
	Cable	Connector
0	None	None
2	Flexible hose with FEP sheath	None
5	None	IP172
7	Flexible hose with FEP sheath	IP172

Notes
All dimensions are in mm (in) unless otherwise stated.
1. The total system (chain) length = TQ902 or TQ912 integral cable length + EA902 extension cable length (E).
   For information on combining integral and extension cables to obtain a particular total system (chain) length, see **Total system (chain) length on page 8**. For information on cable length tolerances, see **Total system (chain) length trimming on page 8**.
2. When optional protection such as a flexible stainless-steel hose with FEP sheath is ordered:
   Flexible hose length (G) max. = EA902 extension cable length (E) − 200 mm, for an extension cable that is protected to the maximum extent possible ("fully-covered cable").

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 17 / 21

Enabling the Extraordinary
To Fly To Power To Live


MEGGiTT

MECHANICAL DRAWINGS AND ORDERING INFORMATION *(continued)*


IQS900 signal conditioner

Side and top views

Note: All dimensions in mm (in) unless otherwise stated.

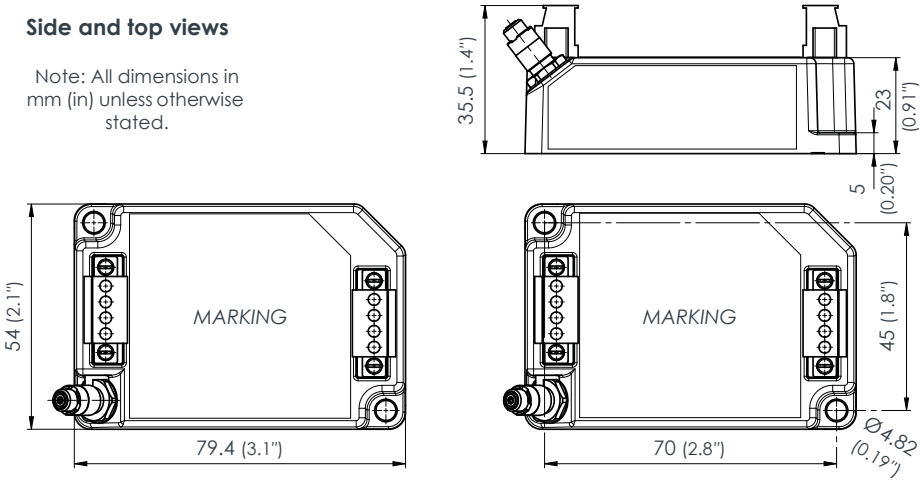

Side and end views with DIN-rail mounting adaptor (ordering option code I1)

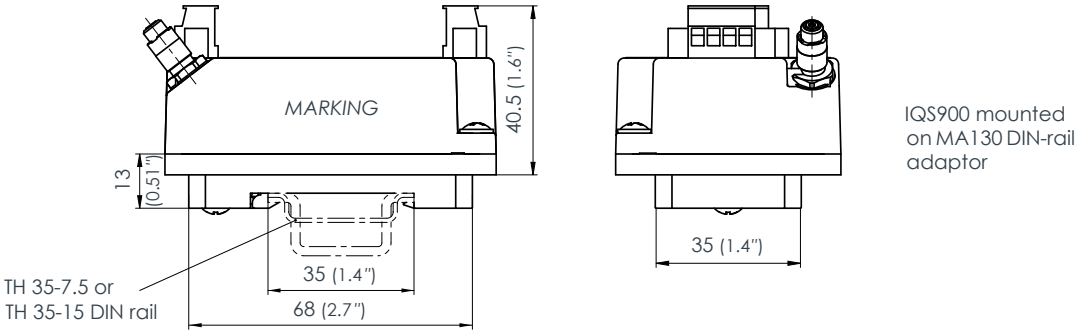

IQS900 mounted on MA130 DIN-rail adaptor

Ordering number: 204 - 900 - 000 - 011 - A B C H I

Environment (A) [1]	
Standard	1
Explosive (Ex)	5

Measurement range	Sensitivity (B)	
2 mm	8 mV/µm	21
	2.5 µA/µm	22
4 mm	4 mV/µm	23
	1.25 µA/µm	24

Diagnostics (C) [2]	
Without diagnostics	1
With diagnostics (SIL)	2

Total system length (H)	
1 m	01
5 m	05
10 m	10

Installation (I)	
Without DIN-rail adaptor	0
With DIN-rail adaptor (MA130)	1

Notes
See following page.

info@apterpower.com +86 18106909650 WHATSAPP QUOTE > SOURCE PAGE 18 / 21

Apter Power

GLOBAL INDUSTRIAL AUTOMATION SOURCING

Ready to source this part?

Ask for availability, pricing and delivery options.

Request a fast quote

Include the product title and any required part number or quantity.

EMAIL

info@apterpower.com

PHONE

+86 18106909650

CHAT ON WHATSAPP >

SCAN TO CHAT ON WHATSAPP

PRODUCT: TQ902-011 111-902-000-011 A1-B1-C42-D2-E10000-F2-G9800-H10 / Vibro-Meter TQ902 Standard-Mount Proximity Sensor

The enclosed manufacturer pages are reproduced without alteration to technical content.
Apter Power is not an authorized distributor, reseller or representative of the products featured.
Product names, trademarks, brands and logos remain the property of their respective owners.