
SIEMENS

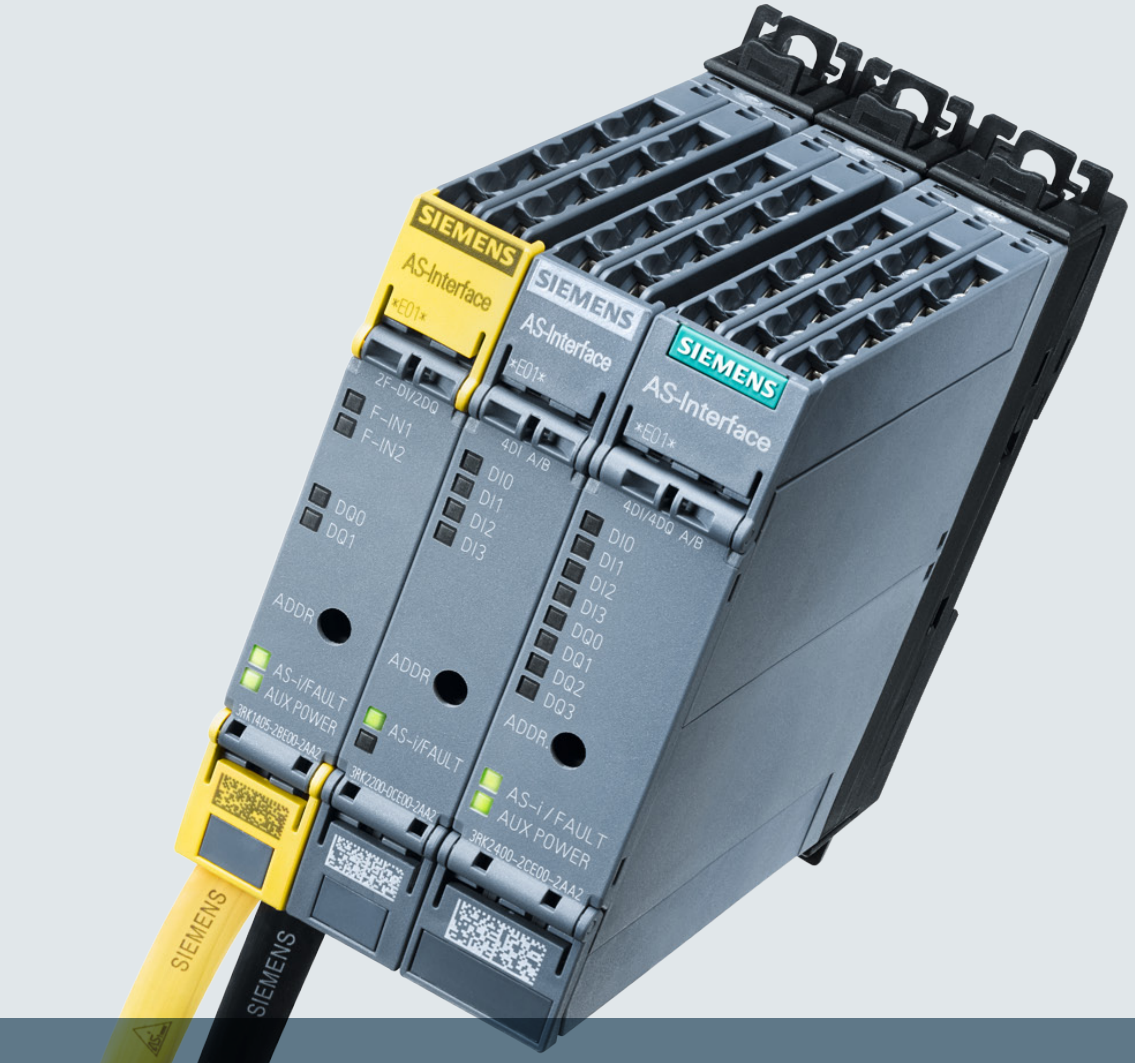

AS-Interface

I/O modules for use in the control cabinet

AS-Interface SlimLine Compact Modules

Manual


Edition 10/2015

siemens.com

Note

To avoid exceeding the maximum current load of the device connectors, you must protect the infeed of the 24 V DC U_{aux} supply with a miniature circuit breaker 6 A Type C.

Only AS÷i SlimLine Compact modules are permitted to be used on the 3RK19 device connectors!

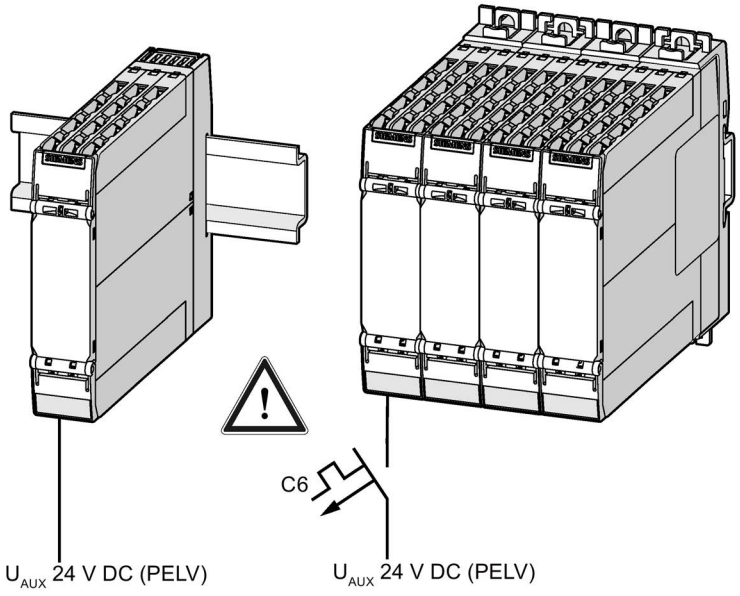

Acc. to IEC 60990 (PELV),
protection class III

Article number

Article number	Type of device connector
3RK1901-1YA00	Device connector for enclosure, width 17.5 mm
3RK1901-1YA10	Device connector for enclosure, width 22.5 mm
3RK1901-1YA01	Device termination connector for enclosure, width 17.5 mm
3RK1901-1YA11	Device termination connector for enclosure, width 22.5 mm

Use of device connectors

The following device connectors are required for the various enclosure widths of the devices:

Devices	Device connector for enclosure, width 17.5 mm 3RK1901-1YA00	Device connector for enclosure, width 22.5 mm 3RK1901-1YA10	Device termination connector for enclosure, width 17.5 mm 3RK1901-1YA01	Device termination connector for enclosure, width 22.5 mm 3RK1901-1YA11
Digital modules				
3RK2200-0C.00-2AA2	✓	-	✓	-
3RK2200-2C.00-2AA2	-	✓	-	✓
3RK2402-2M.00-2AA2	-	✓	-	✓
3RK2100-1C.00-2AA2	-	✓	-	✓
3RK2400-2C.00-2AA2	-	✓	-	✓
3RK1400-2C.00-2AA2	-	✓	-	✓
3RK2402-2C.00-2AA2	-	✓	-	✓
ASIsafe modules				
3RK1205-0B.00-2AA2	✓	-	✓	-
3RK1405-2B.00-2AA2	-	✓	-	✓